


AELFW 201 ... AELFW 208 FLANSCHLAGER MIT EXZENTERRING, GUSSGEHÄUSE

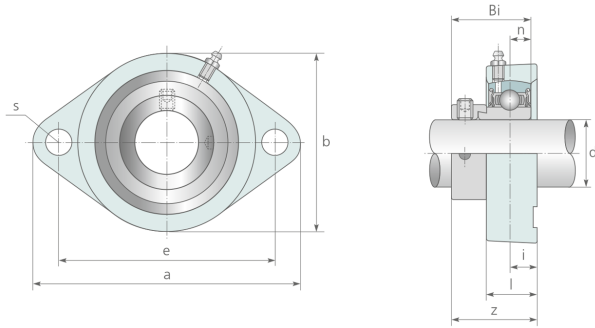

	Abmessungen [mm]													Tragzahl [kN]		Gewicht
	d[mm]	a	e	i	l	s	b	z	Bi	n	S Schraube	Lager	Gehäuse	dyn.C	stat.C0	[kg]
AELFW 201	12	81,0	63,5	7,5	15,0	7	59,0	30,1	19,1	6,0	M6	AEL 201	FW 201	9,6	4,8	0,33
AELFW 202	15	81,0	63,5	7,5	15,0	7	59,0	30,1	19,1	6,0	M6	AEL 202	FW 202	9,6	4,8	0,32
AELFW 203	17	81,0	63,5	7,5	15,0	7	59,0	30,1	19,1	6,0	M6	AEL 203	FW 203	9,6	4,8	0,32
AELFW 204	20	90,5	71,4	9,5	17,0	10	66,5	33,5	21,5	7,0	M8	AEL 204	FW 204	12,8	6,7	0,42
AELFW 205	25	97,0	76,2	9,5	17,5	10	71,0	33,0	21,5	7,5	M8	AEL 205	FW 205	14,0	7,9	0,50
AELFW 206	30	112,5	90,5	10,0	21,0	12	84,0	37,7	23,8	8,0	M10	AEL 206	FW 206	19,5	11,3	0,77
AELFW 207	35	126,0	100,0	10,0	22,0	12	94,0	40,4	25,4	8,5	M10	AEL 207	FW 207	25,7	15,4	1,09
AELFW 208	40	148,0	119,0	14,5	25,0	14	104,0	47,2	30,2	9,0	M12	AEL 208	FW 208	32,0	17,8	1,30