


GABELLAGERBOCK 180° Typ CBA DIN ISO 8132 CBA ...

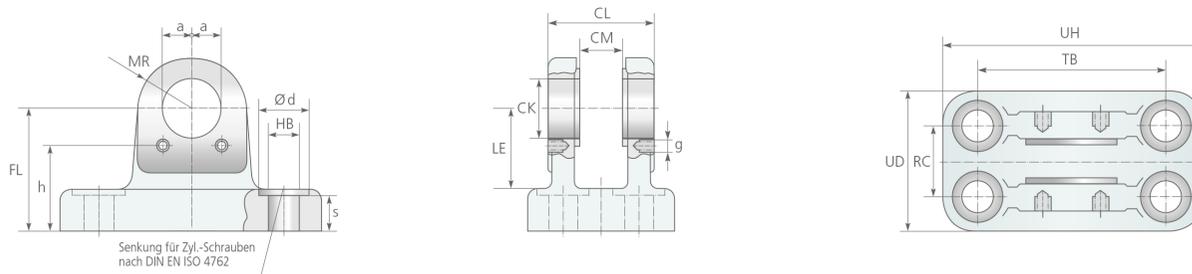

	a 1)	CK H9	CL	CM	Ø d	FL	g	h	HB	LE	MR	RC	s 1)	TB	UD	UH	m	F nom.
	[mm]	[mm]	H16 [mm]	A12 [mm]	[mm]	Js12 [mm]	[-]	[mm]	H13 [mm]	max [mm]	max [mm]	Js14 [mm]	[-]	Js14 [mm]	max [mm]	max [mm]	[kg]	[kN]
CBA 40	21,0	40	90	40	33	76	M 8	53,0	22,0	52	40	65	22,0	130	108	170	5,04	80,0
CBA 63	27,5	63	140	63	48	112	M 10	77,0	33,0	75	63	100	35,0	210	160	270	16,40	200,0
CBA 20	12,5	20	45	20	18	45	M 6	31,0	11,0	30	20	32	13,5	75	58	98	0,90	20,0
CBA 16	8,0	16	36	16	18	40	M 6	28,5	11,0	27	16	26	12,0	65	50	90	0,59	12,5
CBA 70 1	30,0	70	150	70	48	130	M 10	90,0	33,0	90	70	110	38,0	230	175	300	-	250,0
CBA 80	30,0	80	170	80	57	140	M 10	96,0	39,0	95	80	125	43,0	250	210	320	30,0	320,0
CBA 90 1	35,0	90	190	90	66	160	M 10	112,0	45,0	108	90	140	50,0	290	230	370	-	400,0
CBA 50	22,5	50	110	50	40	95	M 8	65,5	26,0	65	50	80	28,0	170	130	220	10,15	125,0
CBA 110 1	50,0	110	240	110	76	200	M 12	140,0	52,0	138	110	180	59,0	350	290	445	-	635,0
CBA 125 1	60,0	125	270	125	66	230	M 12	159,0	45,0	170	125	200	57,0	385	320	470	-	800,0
CBA 25	12,5	25	56	25	20	55	M 6	38,5	13,5	37	25	40	16,5	85	70	113	1,58	32,0
CBA 10	5,5	10	24	10	11	32	M 5	22,5	6,6	22	10	17	9,0	42	33	60	-	5,0
CBA 100 1	45,0	100	210	100	66	180	M 10	124,0	45,0	120	100	160	57,0	315	260	400	-	500,0
CBA 32	15,0	32	70	32	26	65	M 6	45,0	17,5	43	32	50	20,0	110	85	143	2,88	50,0
CBA 12	5,5	12	28	12	15	34	M 5	24,5	9,0	22	12	20	11,0	50	40	70	0,31	8,0