


# SCHRÄG-GELENKLAGER DIN ISO 12240-2

## Gleitpaarung: Stahl/Stahl >> wartungspflichtig GE ... SX

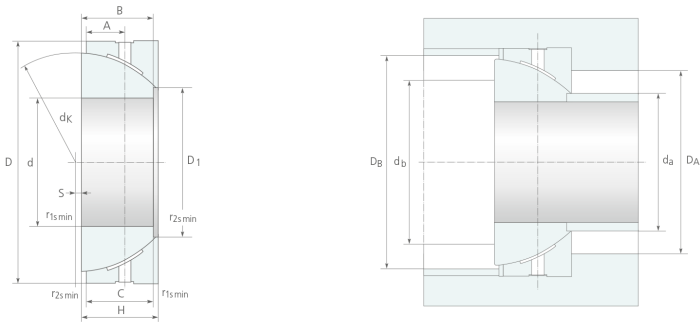

	d	D	B	C	H	dK	D1	S	A	r	r2s	da	db	DA	DB	C	C0	m
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kN]	[kN]	[kg]
GE 25 SX	25	47	14	14,0	15	42,5	31,4	1,0	7,5	0,6	0,2	30,1	39,5	34,0	43,0	47,5	236	0,148
GE 28 SX	28	52	15	15,0	16	47,0	35,7	1,0	8,0	1,0	0,3	34,4	42,0	40,0	47,5	60,0	300	0,186
GE 30 SX	30	55	16	16,0	17	50,0	36,1	2,0	8,5	1,0	0,3	34,6	45,0	40,5	50,5	63,0	315	0,208
GE 32 SX	32	58	17	16,0	17	52,0	37,5	2,0	8,5	1,0	0,3	37,9	47,5	44,0	54,0	71,0	354	0,241
GE 35 SX	35	62	17	17,0	18	56,0	42,4	2,0	9,0	1,0	0,3	41,1	50,0	47,0	57,0	77,0	390	0,268
GE 40 SX	40	68	18	18,0	19	60,0	46,8	1,5	9,5	1,0	0,3	45,5	54,0	52,0	61,0	76,5	450	0,327
GE 45 SX	45	75	19	19,0	20	66,0	52,9	1,5	10,0	1,0	0,3	51,7	60,0	58,0	67,0	106,0	530	0,416
GE 50 SX	50	80	19	19,0	20	74,0	59,1	4,0	10,0	1,0	0,3	57,9	67,0	65,0	75,0	118,0	585	0,455
GE 55 SX	55	90	22	22,0	23	80,0	62,0	4,0	11,5	1,5	0,6	60,7	71,0	70,0	81,0	146,0	735	0,645
GE 60 SX	60	95	22	22,0	23	86,0	68,1	5,0	11,5	1,5	0,6	66,9	77,0	76,0	87,0	160,0	800	0,714
GE 65 SX	65	100	22	22,0	23	92,0	75,6	5,0	11,5	1,5	0,6	74,4	83,0	84,0	93,0	173,0	865	0,759
GE 70 SX	70	110	24	24,0	25	102,0	82,2	7,0	12,5	1,5	0,6	80,9	92,0	90,0	104,0	208,0	1040	1,040
GE 75 SX	75	115	25	24,0	25	107,0	84,4	7,9	12,5	1,5	0,6	84,7	95,0	94,0	107,0	220,0	1129	1,120
GE 80 SX	80	125	27	27,0	29	115,0	90,5	10,0	14,5	1,5	0,6	88,0	104,0	99,0	117,0	250,0	1250	1,540
GE 85 SX	85	130	29	26,5	29	122,0	94,8	9,4	14,5	1,5	0,6	94,4	109,0	105,0	122,0	284,0	1422	1,610
GE 90 SX	90	140	30	30,0	32	130,0	103,3	11,0	16,0	2,0	0,6	100,8	118,0	112,0	132,0	320,0	1600	2,090
GE 95 SX	95	145	32	29,5	32	135,0	104,4	10,8	16,0	2,0	0,6	105,4	119,0	117,0	137,0	335,0	1750	2,220
GE 100 SX	100	150	30	30,0	32	140,0	114,3	12,0	16,0	2,0	0,6	112,0	128,0	123,0	142,0	345,0	1760	2,340
GE 105 SX	105	160	35	32,5	35	148,0	113,8	12,3	17,5	2,5	0,6	116,8	137,0	129,0	152,0	423,0	2116	2,930

GE 110 SX	110	170	36	36,0	38	160,0	125,8	15,0	19,0	2,5	0,6	123,2	146,0	135,0	162,0	475,0	2360	3,680
GE 120 SX	120	180	36	36,0	38	170,0	135,4	17,0	19,0	2,5	0,6	132,9	155,0	145,0	172,0	510,0	2550	3,970
GE 130 SX	130	200	42	42,0	45	190,0	148,0	20,0	22,5	2,5	0,6	143,9	174,0	158,0	192,0	640,0	3200	5,920
GE 140 SX	140	210	42	42,0	45	200,0	160,6	20,0	22,5	2,5	0,6	156,9	184,0	171,0	202,0	680,0	3450	6,330
GE 150 SX	150	225	45	45,0	48	213,0	170,9	21,0	24,0	3,0	1,0	167,1	194,0	184,0	216,0	780,0	3900	8,010
GE 160 SX	160	240	48	48,0	51	225,0	181,4	21,0	25,5	3,0	1,0	177,7	206,0	195,0	228,0	900,0	4500	9,420
GE 170 SX	170	260	51	54,0	57	250,0	194,3	27,0	28,5	3,0	1,0	190,4	228,0	208,0	253,0	1100,0	5500	12,300
GE 180 SX	180	280	61	61,0	64	260,0	205,5	21,0	32,0	3,0	1,0	201,7	240,0	220,0	263,0	1320,0	6700	17,400
GE 190 SX	190	290	61	61,0	64	275,0	211,8	29,0	32,0	3,0	1,0	207,9	252,0	226,0	278,0	1370,0	6950	18,200
GE 200 SX	200	310	66	66,0	70	290,0	229,2	26,0	35,0	3,0	1,0	224,1	268,0	244,0	293,0	1560,0	7800	22,500