


## Kugellager

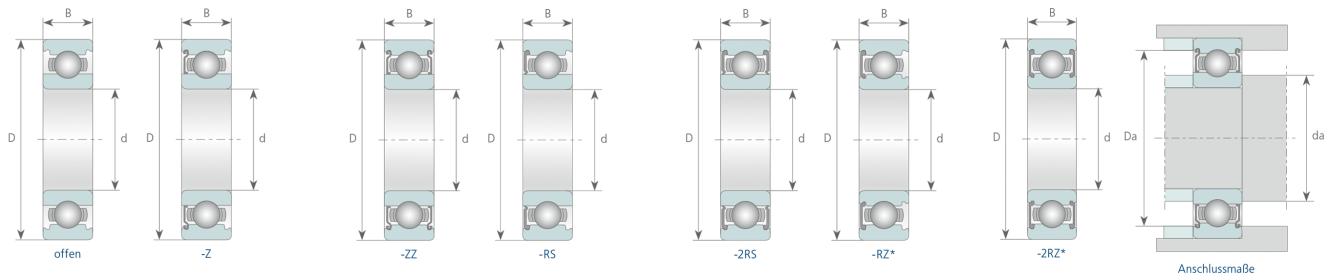

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-6800-2RS	10	19	5,0	1460	740	22000	0	12,0	17,0	0,00500
SS-6801-2RS	12	21	5,0	1530	830	18500	0	14,0	19,0	0,00600
SS-6802-2RS	15	24	5,0	1660	1000	15000	0	17,0	22,0	0,00700
SS-6803-2RS	17	26	5,0	1760	1120	13000	0	19,0	24,0	0,00800
SS-6804-2RS	20	32	7,0	2760	1800	11200	0	22,0	30,0	0,01900
SS-6805-2RS	25	37	7,0	3440	2080	8500	0	27,0	35,0	0,02200
SS-6806-2RS	30	42	7,0	3520	2320	7500	0	32,0	40,0	0,02600
SS-6807-2RS	35	47	7,0	3200	2600	6500	0	37,0	45,0	0,02900
SS-6808-2RS	40	52	7,0	3600	3240	5500	0	42,0	50,0	0,03300