


Kugellager

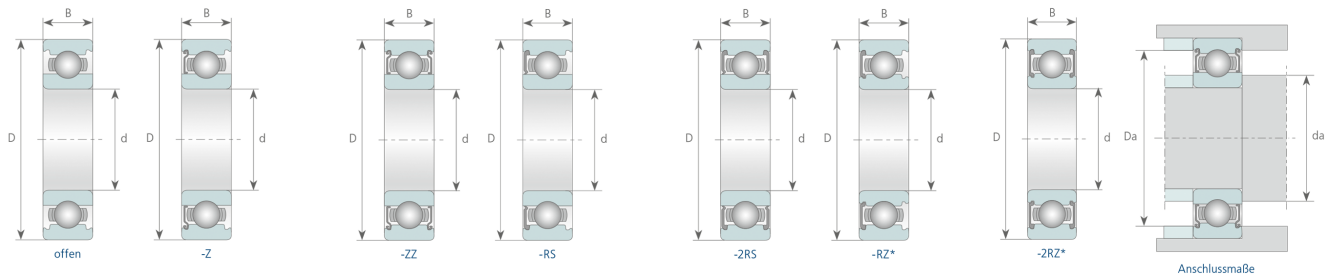

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-6300-2RS	10	35	11,0	7400	3100	13000	0	14,2	30,8	0,05300
SS-6301-2RS	12	37	12,0	8700	3800	12000	0	17,6	31,4	0,06000
SS-6302-2RS	15	42	13,0	10200	4900	10000	0	20,6	36,4	0,08200
SS-6303-2RS	17	47	14,0	12100	5900	9000	0	22,6	41,4	0,11500
SS-6304-2RS	20	52	15,0	14300	7100	8000	0	27,0	45,0	0,14400
SS-6306-2RS	30	72	19,0	24000	13500	5500	0	37,0	65,0	0,36000
SS-6307-2RS	35	80	21,0	30000	17100	4800	0	44,0	71,0	0,45700
SS-6308-2RS	40	90	23,0	36400	21600	4200	0	49,0	81,0	0,63000
SS-6309-2RS	45	85	23,0	47400	28500	4000	0	52,0	78,0	0,83800
SS-6310-2RS	50	110	27,0	55800	34100	3200	0	61,0	99,0	1,06200
SS-6312-2RS	60	130	31,0	73400	46700	2900	0	72,0	99,9	1,72000
SS-6314-2RS	70	150	35,0	94000	61300	2400	0	82,0	99,9	2,50000