


Kugellager

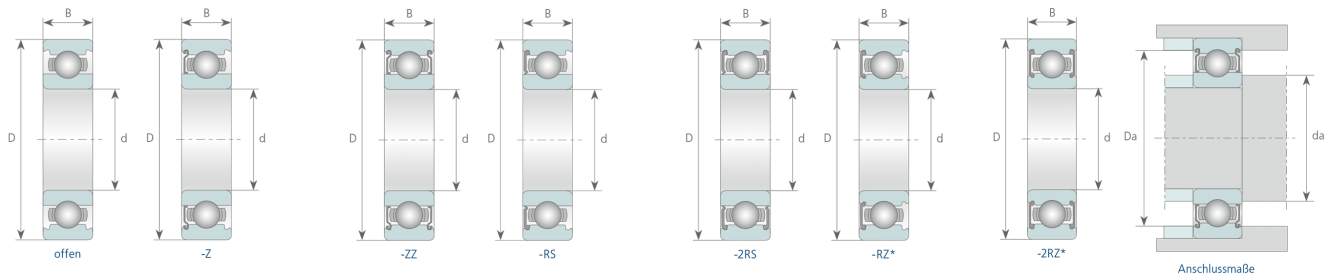

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min ⁻¹]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6800	10	19	5,0	1830	925	32000	38000	12,0	17,0	0,00500
SS-6800-2RS	10	19	5,0	1460	740	22000	0	12,0	17,0	0,00500
6800-ZZ	10	19	5,0	1830	925	32000	0	12,0	17,0	0,00500
6800-2RS	10	19	5,0	1830	925	24000	0	12,0	17,0	0,00500
6801	12	21	5,0	1920	1040	29000	35000	14,0	19,0	0,00600
6801-2RS	12	21	5,0	1920	1040	20000	0	14,0	19,0	0,00600
6801-ZZ	12	21	5,0	1920	1040	29000	0	14,0	19,0	0,00600
SS-6801-2RS	12	21	5,0	1530	830	18500	0	14,0	19,0	0,00600
SS-6802-2RS	15	24	5,0	1660	1000	15000	0	17,0	22,0	0,00700
6802-ZZ	15	24	5,0	2080	1260	26000	0	17,0	22,0	0,00700
6802-2RS	15	24	5,0	2080	1260	17000	0	17,0	22,0	0,00700
6802	15	24	5,0	2080	1260	26000	31000	17,0	22,0	0,00700
SS-6803-2RS	17	26	5,0	1760	1120	13000	0	19,0	24,0	0,00800
6803-ZZ	17	26	5,0	2200	1400	24000	0	19,0	24,0	0,00800
6803	17	26	5,0	2200	1400	24000	28000	19,0	24,0	0,00800
6803-2RS	17	26	5,0	2200	1400	15000	0	19,0	24,0	0,00800
6804-2RS	20	32	7,0	3450	2250	13000	0	22,0	30,0	0,01900
6804-ZZ	20	32	7,0	3450	2250	21000	0	22,0	30,0	0,01900
SS-6804-2RS	20	32	7,0	2760	1800	11200	0	22,0	30,0	0,01900
6804	20	32	7,0	3450	2250	21000	25000	22,0	30,0	0,01900
SS-6805-2RS	25	37	7,0	3440	2080	8500	0	27,0	35,0	0,02200
6805	25	37	7,0	4300	2600	18000	21000	27,0	35,0	0,02200
6805-2RS	25	37	7,0	4300	2600	10000	0	27,0	35,0	0,02200
6805-ZZ	25	37	7,0	4300	2600	18000	0	27,0	35,0	0,02200
6806-2RS	30	42	7,0	4400	2900	8800	0	32,0	40,0	0,02600
6806	30	42	7,0	4400	2900	15000	18000	32,0	40,0	0,02600
SS-6806-2RS	30	42	7,0	3520	2320	7500	0	32,0	40,0	0,02600
6806-ZZ	30	42	7,0	4400	2900	15000	0	32,0	40,0	0,02600
6807-ZZ	35	47	7,0	4000	3250	13000	0	37,0	45,0	0,02900
6807-2RS	35	47	7,0	4000	3250	7600	0	37,0	45,0	0,02900
6807	35	47	7,0	4000	3250	13000	16000	37,0	45,0	0,02900
SS-6807-2RS	35	47	7,0	3200	2600	6500	0	37,0	45,0	0,02900
6808-2RS	40	52	7,0	4500	4050	6700	0	42,0	50,0	0,03300
SS-6808-2RS	40	52	7,0	3600	3240	5500	0	42,0	50,0	0,03300

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6808-ZZ	40	52	7,0	4500	4050	12000	0	42,0	50,0	0,03300
6808	40	52	7,0	4500	4050	12000	14000	42,0	50,0	0,03300
6809-ZZ	45	58	7,0	6400	5650	9500	0	47,0	56,0	0,04000
6809-2RS	45	58	7,0	6400	5650	5900	0	47,0	56,0	0,04000
6809	45	58	7,0	6400	5650	9500	12000	47,0	56,0	0,04000
6810-2RS	50	65	7,0	6600	6100	5300	0	52,0	63,0	0,05200
6810	50	65	7,0	6600	6100	9600	11000	52,0	63,0	0,05200
6810-ZZ	50	65	7,0	6600	6100	9600	0	52,0	63,0	0,05200
6811-ZZ	55	72	9,0	8800	8100	8700	0	57,0	70,0	0,08300
6811-2RS	55	72	9,0	8800	8100	4800	0	57,0	70,0	0,08300
6811	55	72	9,0	8800	8100	8700	10000	57,0	70,0	0,08300
6812-ZZ	60	78	10,0	11500	10600	8000	0	62,0	76,0	0,10600
6812-2RS	60	78	10,0	11500	10600	4400	0	62,0	76,0	0,10600
6812	60	78	10,0	11500	10600	8000	9400	62,0	76,0	0,10600
6813-ZZ	65	85	10,0	11600	11000	7400	0	69,0	81,0	0,12800
6813-2RS	65	85	10,0	11600	11000	4100	0	69,0	81,0	0,12800
6813	65	85	10,0	11600	11000	7400	8700	69,0	81,0	0,12800
6814-ZZ	70	90	10,0	12100	11900	6900	0	74,0	86,0	0,13700
6814	70	90	10,0	12100	11900	6900	8100	74,0	86,0	0,13700
6814-2RS	70	90	10,0	12100	11900	3800	0	74,0	86,0	0,13700
6815-ZZ	75	95	10,0	12500	12900	6400	0	79,0	91,0	0,14500
6815-2RS	75	95	10,0	12500	12900	3600	0	79,0	91,0	0,14500
6815	75	95	10,0	12500	12900	6400	7600	79,0	91,0	0,14500
6816-ZZ	80	100	10,0	12700	13300	6000	0	84,0	96,0	0,15400
6816-2RS	80	100	10,0	12700	13300	3400	0	84,0	96,0	0,15400
6816	80	100	10,0	12700	13300	6000	7100	84,0	96,0	0,15400
6818-ZZ	90	115	13,0	19000	19700	5400	0	95,0	99,9	0,28500
6818	90	115	13,0	19000	19700	5400	6300	95,0	99,9	0,28500
6818-2RS	90	115	13,0	19000	19700	3000	0	95,0	99,9	0,28500
6819	95	120	13,0	19300	20500	5000	5900	99,9	99,9	0,30000
6819-2RS	95	120	13,0	19300	20500	2800	0	99,9	99,9	0,30000
6819-ZZ	95	120	13,0	19300	20500	5000	0	99,9	99,9	0,30000
6820-ZZ	100	125	13,0	19600	21200	4800	0	99,9	99,9	0,31300
6820-2RS	100	125	13,0	19600	21200	2700	0	99,9	99,9	0,31300
6820	100	125	13,0	19600	21200	4800	5600	99,9	99,9	0,31300
6821-ZZ	105	130	13,0	19800	22000	4600	0	99,9	99,9	0,33000
6821-2RS	105	130	13,0	19800	22000	0	0	99,9	99,9	0,33000
6821	105	130	13,0	19800	22000	4600	5400	99,9	99,9	0,33000
6822	110	140	16,0	28100	29000	4300	5100	99,9	99,9	0,51500
6822-ZZ	110	140	16,0	28100	29000	4300	0	99,9	99,9	0,51500
6822-2RS	110	140	16,0	28100	29000	0	0	99,9	99,9	0,51500
6824-ZZ	120	150	16,0	28900	33000	4000	0	99,9	99,9	0,55500
6824-2RS	120	150	16,0	28900	33000	0	0	99,9	99,9	0,55500
6824	120	150	16,0	28900	33000	4000	4700	99,9	99,9	0,55500
6826-2RS	130	165	18,0	37000	41000	0	0	99,9	99,9	0,80000

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6826	130	165	18,0	37000	41000	3700	4300	99,9	99,9	0,80000
6826-ZZ	130	165	18,0	37000	41000	3700	0	99,9	99,9	0,80000
6828	140	175	18,0	38500	44500	3400	4000	99,9	99,9	0,85000
6828-2RS	140	175	18,0	38500	44500	0	0	99,9	99,9	0,85000
6828-ZZ	140	175	18,0	38500	44500	3400	0	99,9	99,9	0,85000
6830-ZZ	150	190	20,0	47500	55000	3100	0	99,9	99,9	1,16000
6830-2RS	150	190	20,0	47500	55000	0	0	99,9	99,9	1,16000
6830	150	190	20,0	47500	55000	3100	3700	99,9	99,9	1,16000
6832	160	200	20,0	48500	57000	2900	8400	99,9	99,9	1,32000
6834	170	215	22,0	60000	70500	2700	3200	99,9	99,9	1,63000
6836	180	225	22,0	60500	73000	2600	3000	99,9	99,9	2,03000
6838	190	240	24,0	73000	88000	2400	2900	99,9	99,9	2,62000
6840	200	250	24,0	74000	91500	2300	2700	99,9	99,9	2,73000
6844	220	270	24,0	76500	98000	2100	2400	99,9	99,9	3,00000
6848	240	300	28,0	98500	127000	1900	2200	99,9	99,9	4,60000