


Kugellager

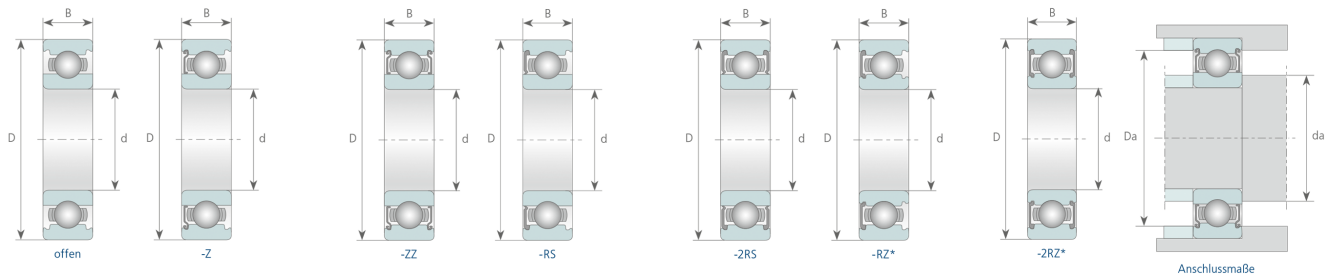

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6900-ZZ	10	22	6,0	2700	1270	30000	0	12,0	20,0	0,00900
6900	10	22	6,0	2700	1270	30000	36000	12,0	20,0	0,00900
6900-2RS	10	22	6,0	2700	1270	21000	0	12,0	20,0	0,00900
SS-6900-2RS	10	22	6,0	2160	1000	19000	0	12,0	20,0	0,00900
6901-ZZ	12	24	6,0	2890	1460	27000	0	14,0	22,0	0,01100
6901	12	24	6,0	2890	1460	27000	32000	14,0	22,0	0,01100
SS-6901-2RS	12	24	6,0	2310	1160	17500	0	14,0	22,0	0,01100
6901-2RS	12	24	6,0	2890	1460	19000	0	14,0	22,0	0,01100
6902-ZZ	15	28	7,0	4100	2060	24000	0	17,0	26,0	0,01600
SS-6902-2RS	15	28	7,0	3280	1640	14500	0	17,0	26,0	0,01600
6902-2RS	15	28	7,0	4100	2060	16000	0	17,0	26,0	0,01600
6902	15	28	7,0	4100	2060	24000	28000	17,0	26,0	0,01600
6903-2RS	17	30	7,0	4650	2580	14000	0	19,0	28,0	0,01800
6903	17	30	7,0	4650	2580	22000	26000	19,0	28,0	0,01800
6903-ZZ	17	30	7,0	4650	2580	22000	0	19,0	28,0	0,01800
SS-6903-2RS	17	30	7,0	3720	2060	12000	0	19,0	28,0	0,01800
6904-ZZ	20	37	9,0	6400	3700	19000	0	22,0	35,0	0,03600
SS-6904-2RS	20	37	9,0	5120	2960	10500	0	22,0	35,0	0,03600
6904-2RS	20	37	9,0	6400	3700	12000	0	22,0	35,0	0,03600
6904	20	37	9,0	6400	3700	19000	23000	22,0	35,0	0,03600
SS-6905-2RS	25	42	9,0	5640	3640	8400	0	27,0	40,0	0,04200
6905	25	42	9,0	7050	4550	16000	19000	27,0	40,0	0,04200
6905-ZZ	25	42	9,0	7050	4550	16000	0	27,0	40,0	0,04200
6905-2RS	25	42	9,0	7050	4550	9800	0	27,0	40,0	0,04200
6906-ZZ	30	47	9,0	7250	5000	14000	0	32,0	45,0	0,04800
6906	30	47	9,0	7250	5000	14000	17000	32,0	45,0	0,04800
SS-6906-2RS	30	47	9,0	5800	4000	7200	0	32,0	45,0	0,04800
6906-2RS	30	47	9,0	7250	5000	8400	0	32,0	45,0	0,04800
6907	35	55	10,0	11200	7450	12000	15000	39,0	51,0	0,07400
SS-6907-2RS	35	55	10,0	8960	5960	6200	0	39,0	51,0	0,07400
6907-2RS	35	55	10,0	11200	7450	7100	0	39,0	51,0	0,07400
6907-ZZ	35	55	10,0	11200	7450	12000	0	39,0	51,0	0,07400
6908-ZZ	40	62	12,0	14600	10200	11000	0	44,0	58,0	0,11000
6908-2RS	40	62	12,0	14600	10200	6300	0	44,0	58,0	0,11000

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6908	40	62	12,0	14600	10200	11000	13000	44,0	58,0	0,11000
SS-6908-2RS	40	62	12,0	11680	8160	5200	0	44,0	58,0	0,11000
6909	45	68	12,0	15100	11200	9800	12000	49,0	64,0	0,12800
6909-ZZ	45	68	12,0	15100	11200	9800	0	49,0	64,0	0,12800
6909-2RS	45	68	12,0	15100	11200	5600	0	49,0	64,0	0,12800
6910-ZZ	50	72	12,0	15600	12200	8900	0	54,0	68,0	0,13200
6910	50	72	12,0	15600	12200	8900	11000	54,0	68,0	0,13200
6911-2RS	55	80	13,0	16000	13300	4600	0	60,0	75,0	0,18000
6911-ZZ	55	80	13,0	16000	13300	8200	0	60,0	75,0	0,18000
6911	55	80	13,0	16000	13300	8200	9600	60,0	75,0	0,18000
6912	60	85	13,0	16400	14300	7600	8900	65,0	80,0	0,19300
6912-2RS	60	85	13,0	16400	14300	4300	0	65,0	80,0	0,19300
6912-ZZ	60	85	13,0	16400	14300	7600	0	65,0	80,0	0,19300
6913-ZZ	65	90	13,0	17400	16100	7000	0	70,0	85,0	0,20600
6913-2RS	65	90	13,0	17400	16100	4000	0	70,0	85,0	0,20600
6913	65	90	13,0	17400	16100	7000	8200	70,0	85,0	0,20600
6914-2RS	70	100	16,0	23700	21200	3700	0	75,0	95,0	0,33400
6914	70	100	16,0	23700	21200	6500	7700	75,0	95,0	0,33400
6914-ZZ	70	100	16,0	23700	21200	6500	0	75,0	95,0	0,33400
6915	75	105	16,0	24400	22600	6100	7200	80,0	99,9	0,35300
6915-ZZ	75	105	16,0	24400	22600	6100	0	80,0	99,9	0,35300
6915-2RS	75	105	16,0	24400	22600	3500	0	80,0	99,9	0,35300
6916-2RS	80	110	16,0	24900	24000	3200	0	85,0	99,9	0,37300
6916	80	110	16,0	24900	24000	5700	6700	85,0	99,9	0,37300
6916-ZZ	80	110	16,0	24900	24000	5700	0	85,0	99,9	0,37300
6918-2RS	90	125	18,0	33000	31500	2900	0	96,5	99,9	0,55400
6918	90	125	18,0	33000	31500	5100	6000	96,5	99,9	0,55400
6918-ZZ	90	125	18,0	33000	31500	5100	0	96,5	99,9	0,55400
6919	95	130	18,0	33500	33500	4800	5700	99,9	99,9	0,57900
6919-ZZ	95	130	18,0	33500	33500	4800	0	99,9	99,9	0,57900
6919-2RS	95	130	18,0	33500	33500	2800	0	99,9	99,9	0,57900
6920-ZZ	100	140	20,0	41000	39500	4500	0	99,9	99,9	0,78500
6920	100	140	20,0	41000	39500	4500	5300	99,9	99,9	0,78500
6920-2RS	100	140	20,0	41000	39500	0	0	99,9	99,9	0,78500
6921	105	145	20,0	42500	42000	4300	5100	99,9	99,9	0,81600
6921-2RS	105	145	20,0	42500	42000	2500	0	99,9	99,9	0,81600
6921-ZZ	105	145	20,0	42500	42000	4300	0	99,9	99,9	0,81600
6922	110	150	20,0	43500	44500	4100	4800	99,9	99,9	0,84900
6922-ZZ	110	150	20,0	43500	44500	4100	0	99,9	99,9	0,84900
6922-2RS	110	150	20,0	43500	44500	2400	0	99,9	99,9	0,84900
6924-ZZ	120	165	22,0	53000	54000	3800	0	99,9	99,9	1,15000
6924-2RS	120	165	22,0	53000	54000	0	0	99,9	99,9	1,15000
6924	120	165	22,0	53000	54000	3800	4400	99,9	99,9	1,15000
6926-2RS	130	180	24,0	65000	67500	0	0	99,9	99,9	1,52000
6926	130	180	24,0	65000	67500	3500	4100	99,9	99,9	1,52000

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6926-ZZ	130	180	24,0	65000	67500	3500	0	99,9	99,9	1,52000
6928-ZZ	140	190	24,0	66500	71500	3200	0	99,9	99,9	1,62000
6928	140	190	24,0	66500	71500	3200	3800	99,9	99,9	1,62000
6928-2RS	140	190	24,0	66500	71500	0	0	99,9	99,9	1,62000
6930-ZZ	150	210	28,0	85000	90500	3000	0	99,9	99,9	2,47000
6930	150	210	28,0	85000	90500	3000	3500	99,9	99,9	2,47000
6932	160	220	28,0	87000	96000	2800	3300	99,9	99,9	2,61000
6934	170	230	28,0	86000	95500	2600	3100	99,9	99,9	2,74000
6936	180	250	33,0	110000	119000	2400	2900	99,9	99,9	4,76000
6938	190	260	33,0	113000	127000	2300	2700	99,9	99,9	4,98000
6940	200	280	38,0	157000	168000	2200	2600	99,9	99,9	7,10000
6944	220	300	38,0	160000	180000	2000	2300	99,9	99,9	7,69000
6948	240	320	38,0	170000	203000	1800	2100	99,9	99,9	8,26000