


Kugellager

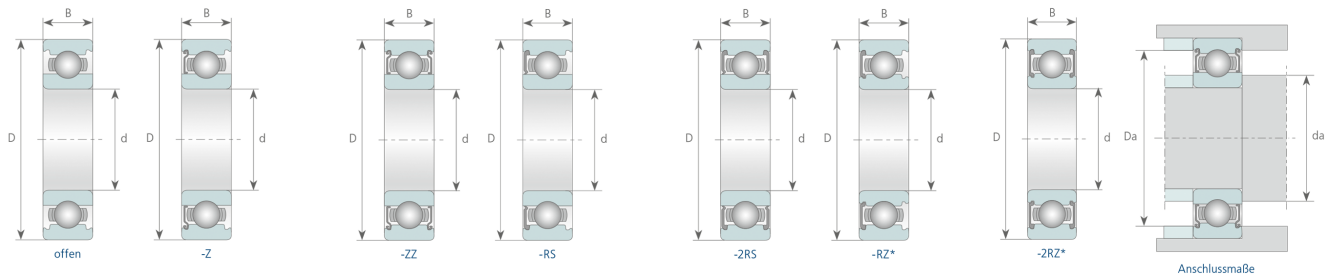

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6300 **	10	35	11,0	8100	3450	20000	26000	14,2	30,8	0,05700
6300-2RS **	10	35	11,0	8100	3450	14000	0	14,2	30,8	0,05700
SS-6300-2RS	10	35	11,0	7400	3100	13000	0	14,2	30,8	0,05300
6300-ZZ **	10	35	11,0	8100	3450	20000	0	14,2	30,8	0,05700
6301 **	12	37	12,0	9650	4150	19000	24000	17,6	31,4	0,06500
6301-2RS **	12	37	12,0	9650	4150	12000	0	17,6	31,4	0,06500
SS-6301-2RS	12	37	12,0	8700	3800	12000	0	17,6	31,4	0,06000
6301-ZZ **	12	37	12,0	9650	4150	19000	0	17,6	31,4	0,06500
6302 **	15	42	13,0	11400	5450	17000	20000	20,6	36,4	0,09200
6302-ZZ **	15	42	13,0	11400	5450	17000	0	20,6	36,4	0,09200
6302-2RS **	15	42	13,0	11400	5450	11000	0	20,6	36,4	0,09200
SS-6302-2RS	15	42	13,0	10200	4900	10000	0	20,6	36,4	0,08200
6303-2RS **	17	47	14,0	13500	6550	11000	0	22,6	41,4	0,12000
6303-ZZ **	17	47	14,0	13500	6550	16000	0	22,6	41,4	0,12000
6303 **	17	47	14,0	13500	6550	16000	19000	22,6	41,4	0,12000
SS-6303-2RS	17	47	14,0	12100	5900	9000	0	22,6	41,4	0,11500
6304-ZZ **	20	52	15,0	15900	7900	13000	0	27,0	45,0	0,15800
6304 **	20	52	15,0	15900	7900	13000	16000	27,0	45,0	0,15800
SS-6304-2RS	20	52	15,0	14300	7100	8000	0	27,0	45,0	0,14400
6304-2RS **	20	52	15,0	15900	7900	8000	0	27,0	45,0	0,15800
6305-2RS **	25	62	17,0	20600	11300	7500	0	32,0	55,0	0,25000
6305-ZZ **	25	62	17,0	20600	11300	11000	0	32,0	55,0	0,25000
6305 **	25	62	17,0	20600	11300	11000	14000	32,0	55,0	0,25000
6306-ZZ **	30	72	19,0	29900	15800	9000	0	37,0	65,0	0,37100
6306-2RS **	30	72	19,0	29900	15800	6000	0	37,0	65,0	0,37100
SS-6306-2RS	30	72	19,0	24000	13500	5500	0	37,0	65,0	0,36000
6306 **	30	72	19,0	29900	15800	9000	11000	37,0	65,0	0,37100
6307-2RS **	35	80	21,0	33500	18300	5600	0	44,0	71,0	0,45000
6307-ZZ **	35	80	21,0	33500	18300	8500	0	44,0	71,0	0,45000
6307 **	35	80	21,0	33500	18300	8500	10000	44,0	71,0	0,45000
SS-6307-2RS	35	80	21,0	30000	17100	4800	0	44,0	71,0	0,45700
6308 **	40	90	23,0	40700	24000	7500	9000	49,0	81,0	0,63500
6308-ZZ **	40	90	23,0	40700	24000	7500	0	49,0	81,0	0,63500
SS-6308-2RS	40	90	23,0	36400	21600	4200	0	49,0	81,0	0,63000

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6308-2RS **	40	90	23,0	40700	24000	5000	0	49,0	81,0	0,63500
6309-2RS **	45	100	25,0	52700	31700	4300	0	54,0	91,0	0,83800
6309-ZZ **	45	100	25,0	52700	31700	6700	0	54,0	91,0	0,83800
SS-6309-2RS	45	85	23,0	47400	28500	4000	0	52,0	78,0	0,83800
6309 **	45	100	25,0	52700	31700	6700	8000	54,0	91,0	0,83800
SS-6310-2RS	50	110	27,0	55800	34100	3200	0	61,0	99,0	1,06200
6310 **	50	110	27,0	62000	37900	6000	7000	61,0	99,0	1,06200
6310-ZZ **	50	110	27,0	62000	37900	6000	0	61,0	99,0	1,06200
6311 **	55	120	29,0	71500	44600	5300	6300	66,0	99,9	1,38000
6311-ZZ **	55	120	29,0	71500	44600	5300	0	66,0	99,9	1,38000
6311-2RS **	55	120	29,0	71500	44600	3600	0	66,0	99,9	1,38000
6312 **	60	130	31,0	81500	51900	5000	6000	72,0	99,9	1,72000
6312-ZZ **	60	130	31,0	81500	51900	5000	0	72,0	99,9	1,72000
SS-6312-2RS	60	130	31,0	73400	46700	2900	0	72,0	99,9	1,72000
6312-2RS **	60	130	31,0	81500	51900	3400	0	72,0	99,9	1,72000
6313-ZZ **	65	140	33,0	93000	59700	4800	0	77,0	99,9	2,10000
6313 **	65	140	33,0	93000	59700	4800	5600	77,0	99,9	2,10000
6313-2RS **	65	140	33,0	93000	59700	3000	0	77,0	99,9	2,10000
6314-ZZ **	70	150	35,0	104000	68100	4500	0	82,0	99,9	2,50000
SS-6314-2RS	70	150	35,0	94000	61300	2400	0	82,0	99,9	2,50000
6314-2RS **	70	150	35,0	104000	68100	2800	0	82,0	99,9	2,50000
6314 **	70	150	35,0	104000	68100	4500	5300	82,0	99,9	2,50000
6315-2RS **	75	160	37,0	114000	77000	2800	0	87,0	99,9	3,03000
6315 **	75	160	37,0	114000	77000	4300	5000	87,0	99,9	3,03000
6315-ZZ **	75	160	37,0	114000	77000	4300	0	87,0	99,9	3,03000
6316-ZZ **	80	170	39,0	122000	86500	3800	0	92,0	99,9	3,60000
6316-2RS **	80	170	39,0	122000	86500	2700	0	92,0	99,9	3,60000
6316 **	80	170	39,0	122000	86500	3800	4500	92,0	99,9	3,60000
6317-ZZ	85	180	41,0	133000	96600	3600	0	99,0	99,9	4,20000
6317-2RS	85	180	41,0	133000	96600	2600	0	99,0	99,9	4,20000
6317	85	180	41,0	133000	96600	3600	4300	99,0	99,9	4,20000
6318	90	190	43,0	143000	107000	3400	4000	99,9	99,9	4,90000
6318-2RS	90	190	43,0	143000	107000	2400	0	99,9	99,9	4,90000
6318-ZZ	90	190	43,0	143000	107000	3400	0	99,9	99,9	4,90000
6319-2RS	95	200	45,0	153000	118000	2300	0	99,9	99,9	5,60000
6319-ZZ	95	200	45,0	153000	118000	3200	0	99,9	99,9	5,60000
6319	95	200	45,0	153000	118000	3200	3800	99,9	99,9	5,60000
6320	100	215	47,0	173000	140000	3000	3600	99,9	99,9	7,00000
6320-ZZ	100	215	47,0	173000	140000	3000	0	99,9	99,9	7,00000
6320-2RS	100	215	47,0	173000	140000	2200	0	99,9	99,9	7,00000
6321-ZZ	105	225	49,0	184000	153000	2800	0	99,9	99,9	8,00000
6321	105	225	49,0	184000	153000	2800	3400	99,9	99,9	8,00000
6322-2RS	110	240	50,0	203000	178000	0	0	99,9	99,9	9,58000
6322	110	240	50,0	203000	178000	2600	3200	99,9	99,9	9,58000
6322-ZZ	110	240	50,0	203000	178000	2600	0	99,9	99,9	9,58000

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6324	120	260	55,0	212000	190000	2400	3000	99,9	99,9	13,60000
6326	130	280	58,0	229000	214000	2200	2800	99,9	99,9	17,00000
6328	140	300	62,0	255000	246000	2000	2600	99,9	99,9	21,00000
6330	150	320	65,0	276000	284000	1900	2400	99,9	99,9	25,00000

