


Kugellager

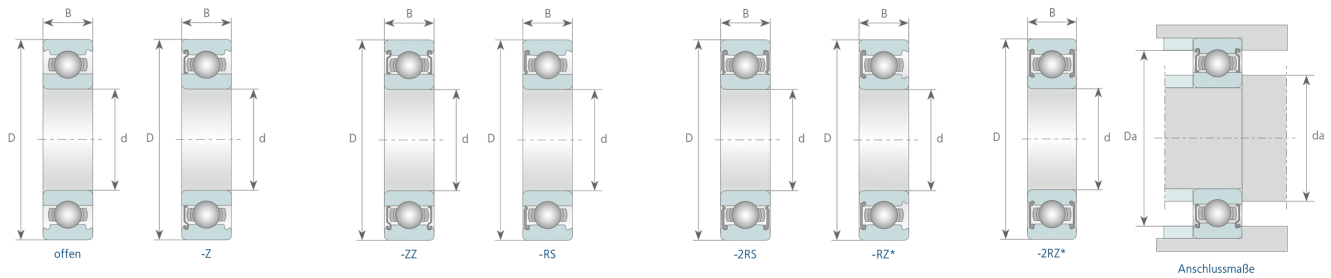

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-6000-2RS	10	26	8,0	4100	1700	17000	0	12,0	24,0	0,01900
6000-ZZ **	10	26	8,0	4550	1950	28000	0	12,0	24,0	0,02000
6000 **	10	26	8,0	4550	1950	28000	34000	12,0	24,0	0,02000
6000-2RS **	10	26	8,0	4550	1950	17000	0	12,0	24,0	0,02000
6001-ZZ **	12	28	8,0	5100	2400	26000	0	14,0	26,0	0,02200
6001-2RS **	12	28	8,0	5100	2400	17000	0	14,0	26,0	0,02200
6001 **	12	28	8,0	5100	2400	26000	32000	14,0	26,0	0,02200
SS-6001-2RS	12	28	8,0	4600	2100	15000	0	14,0	26,0	0,02200
6002 **	15	32	9,0	5600	2850	22000	28000	17,0	30,0	0,03100
6002-ZZ **	15	32	9,0	5600	2850	22000	0	17,0	30,0	0,03100
6002-2RS **	15	32	9,0	5600	2850	14000	0	17,0	30,0	0,03100
SS-6002-2RS	15	32	9,0	5000	2500	12000	0	17,0	30,0	0,03000
6003-ZZ **	17	35	10,0	6800	3250	20000	0	19,0	33,0	0,04200
6003 **	17	35	10,0	6800	3250	20000	26000	19,0	33,0	0,04200
6003-2RS **	17	35	10,0	6800	3250	12000	0	19,0	33,0	0,04200
SS-6003-2RS	17	35	10,0	6100	3000	11000	0	19,0	33,0	0,03900
6004-ZZ **	20	42	12,0	9500	5050	17000	0	23,2	38,8	0,07000
6004 **	20	42	12,0	9500	5050	17000	20000	23,2	38,8	0,07000
6004-2RS **	20	42	12,0	9500	5050	11000	0	23,2	38,8	0,07000
SS-6004-2RS	20	42	12,0	8400	4500	9000	0	23,2	38,8	0,06900
6005-ZZ **	25	47	12,0	10100	5850	15000	0	28,2	43,8	0,08600
6005 **	25	47	12,0	10100	5850	15000	18000	28,2	43,8	0,08600
SS-6005-2RS	25	47	12,0	9000	5200	7500	0	28,2	43,8	0,08000
6005-2RS **	25	47	12,0	10100	5850	9500	0	28,2	43,8	0,08600
6006 **	30	55	13,0	13200	8250	12000	15000	34,6	50,4	0,12900
6006-ZZ **	30	55	13,0	13200	8250	12000	0	34,6	50,4	0,12900
6006-2RS **	30	55	13,0	13200	8250	7500	0	34,6	50,4	0,12900
SS-6006-2RS	30	55	13,0	11900	7500	6000	0	34,6	50,4	0,12000
SS-6007-2RS	35	62	14,0	14400	9300	5000	0	39,6	57,4	0,16000
6007 **	35	62	14,0	15900	10300	10000	13000	39,6	57,4	0,16400
6007-2RS **	35	62	14,0	15900	10300	7000	0	39,6	57,4	0,16400
6007-ZZ **	35	62	14,0	15900	10300	10000	0	39,6	57,4	0,16400
6008 **	40	68	15,0	16800	11600	9500	12000	44,6	63,4	0,21000
6008-2RS **	40	68	15,0	16800	11600	6000	0	44,6	63,4	0,21000

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-6008-2RS	40	68	15,0	15100	10300	4800	0	44,6	63,4	0,19000
6008-ZZ **	40	68	15,0	16800	11600	9500	0	44,6	63,4	0,21000
6009-ZZ **	45	75	16,0	21000	15000	9000	0	49,6	70,4	0,26100
6009 **	45	75	16,0	21000	15000	9000	11000	49,6	70,4	0,26100
SS-6009-2RS	45	75	16,0	20800	14600	4480	0	49,6	70,4	0,26100
6009-2RS **	45	75	16,0	21000	15000	5600	0	49,6	70,4	0,26100
6010-ZZ **	50	80	16,0	21800	16500	8500	0	54,6	75,4	0,26000
6010-2RS **	50	80	16,0	21800	16500	5300	0	54,6	75,4	0,26000
SS-6010-2RS	50	80	16,0	19600	14800	4240	0	54,6	75,4	0,26000
6010 **	50	80	16,0	21800	16500	8500	10000	54,6	75,4	0,26000
6011 **	55	90	18,0	28100	21200	7500	9000	61,0	84,0	0,39000
6011-ZZ **	55	90	18,0	28100	21200	7500	0	61,0	84,0	0,39000
6011-2RS **	55	90	18,0	28100	21200	4500	0	61,0	84,0	0,39000
SS-6011-2RS	55	90	18,0	25300	19100	3600	0	61,0	84,0	0,39000
SS-6012-2RS	60	95	18,0	26600	20900	3440	0	66,0	89,0	0,42000
6012-2RS **	60	95	18,0	29400	23200	4300	0	66,0	89,0	0,42000
6012 **	60	95	18,0	29400	23200	7800	8500	66,0	89,0	0,42000
6012-ZZ **	60	95	18,0	29400	23200	7800	0	66,0	89,0	0,42000
6013-2RS **	65	100	18,0	30500	25200	4000	0	71,0	94,0	0,44000
6013-ZZ **	65	100	18,0	30500	25200	6300	0	71,0	94,0	0,44000
6013 **	65	100	18,0	30500	25200	6300	7500	71,0	94,0	0,44000
SS-6014-2RS	70	110	20,0	34300	28000	3050	0	76,0	99,9	0,60000
6014-ZZ **	70	110	20,0	38100	30900	6000	0	76,0	99,9	0,60000
6014 **	70	110	20,0	38100	30900	6000	7000	76,0	99,9	0,60000
SS-6015-2RS	75	115	20,0	36000	30200	2750	0	81,0	99,9	0,64000
6015-ZZ **	75	115	20,0	39700	33500	5600	0	81,0	99,9	0,64000
6015-2RS **	75	115	20,0	39700	33500	3400	0	81,0	99,9	0,64000
6015 **	75	115	20,0	39700	33500	5600	6700	81,0	99,9	0,64000
SS-6016-2RS	80	125	22,0	43000	36000	2600	0	86,0	99,9	0,85000
6016 **	80	125	22,0	47500	39800	5300	6300	86,0	99,9	0,85000
6016-2RS **	80	125	22,0	47500	39800	3100	0	86,0	99,9	0,85000
6016-ZZ **	80	125	22,0	47500	39800	5300	0	86,0	99,9	0,85000
6017 **	85	130	22,0	49400	43100	5000	6000	91,0	99,9	0,89000
6017-2RS **	85	130	22,0	49400	43100	5000	0	91,0	99,9	0,89000
6017-ZZ **	85	130	22,0	49400	43100	5000	0	91,0	99,9	0,89000
6018-2RS **	90	140	24,0	58500	49700	2800	0	97,0	99,9	1,16000
6018 **	90	140	24,0	58500	49700	4800	5600	97,0	99,9	1,16000
6018-ZZ **	90	140	24,0	58500	49700	4800	0	97,0	99,9	1,16000
6019-ZZ	95	145	24,0	60500	53600	4300	0	99,9	99,9	1,20000
6019-2RS	95	145	24,0	60500	53600	2600	0	99,9	99,9	1,20000
6019	95	145	24,0	60500	53600	4300	5000	99,9	99,9	1,20000
6020-2RS	100	150	24,0	60500	54000	2600	0	99,9	99,9	1,25000
6020	100	150	24,0	60500	54000	4300	5000	99,9	99,9	1,25000
6020-ZZ	100	150	24,0	60500	54000	4300	0	99,9	99,9	1,25000
6021	105	160	26,0	72800	65800	4000	4800	99,9	99,9	1,60000

Kugellager

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6021-ZZ	105	160	26,0	72800	65800	4000	0	99,9	99,9	1,60000
6021-2RS	105	160	26,0	72800	65800	0	0	99,9	99,9	1,60000
6022	110	170	28,0	82000	73000	3800	4500	99,9	99,9	1,95000
6022-ZZ	110	170	28,0	82000	73000	3800	0	99,9	99,9	1,95000
6022-2RS	110	170	28,0	82000	73000	0	0	99,9	99,9	1,95000
6024-2RS	120	180	28,0	85000	79000	0	0	99,9	99,9	2,09000
6024-ZZ	120	180	28,0	85000	79000	3400	0	99,9	99,9	2,09000
6024	120	180	28,0	85000	79000	3400	4000	99,9	99,9	2,09000
6026-ZZ	130	200	33,0	106000	101000	3200	0	99,9	99,9	3,25000
6026-2RS	130	200	33,0	106000	101000	0	0	99,9	99,9	3,25000
6026	130	200	33,0	106000	101000	3200	3800	99,9	99,9	3,25000
6028	140	210	33,0	111000	109000	2800	3400	99,9	99,9	3,35000
6028-ZZ	140	210	33,0	111000	109000	2800	0	99,9	99,9	3,35000
6028-2RS	140	210	33,0	111000	109000	0	0	99,9	99,9	3,35000
6030-ZZ	150	225	35,0	125000	126000	2600	0	99,9	99,9	4,75000
6030-2RS	150	225	35,0	125000	126000	0	0	99,9	99,9	4,75000
6030	150	225	35,0	125000	126000	2600	3200	99,9	99,9	4,75000
6032	160	240	38,0	140000	143000	2400	3000	99,9	99,9	5,85000
6034	170	260	42,0	168000	172000	2200	2800	99,9	99,9	7,80000
6036	180	280	46,0	186000	194000	2000	2600	99,9	99,9	10,50000
6038	190	290	46,0	195000	210000	2000	2600	99,9	99,9	11,00000
6040	200	310	51,0	208000	226000	1900	2400	99,9	99,9	13,09000
6044	220	340	56,0	277000	291000	1800	2200	99,9	99,9	19,00000
6048	240	360	56,0	247000	295000	1700	2000	99,9	99,9	19,50000