


Kugellager Bohrung 10-12 mm

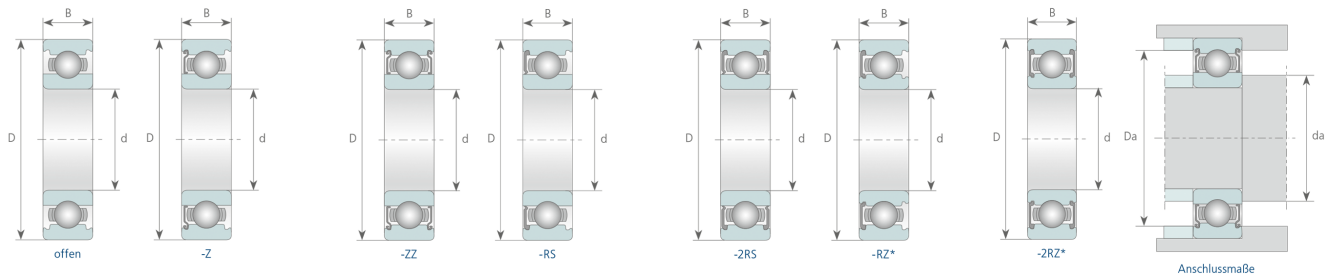

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6900-ZZ	10	22	6,0	2700	1270	30000	0	12,0	20,0	0,00900
SS-6200-2RS	10	30	9,0	4600	2100	15000	0	14,2	25,8	0,03200
6300-ZZ **	10	35	11,0	8100	3450	20000	0	14,2	30,8	0,05700
6900-2RS	10	22	6,0	2700	1270	21000	0	12,0	20,0	0,00900
SS-6300-2RS	10	35	11,0	7400	3100	13000	0	14,2	30,8	0,05300
6300-2RS **	10	35	11,0	8100	3450	14000	0	14,2	30,8	0,05700
62200-2RS	10	30	14,0	5000	2150	16000	0	14,3	25,7	0,04000
6000-2RS **	10	26	8,0	4550	1950	17000	0	12,0	24,0	0,02000
62300-2RS	10	35	17,0	7900	3100	13500	0	14,3	30,7	0,06000
SS-6900-2RS	10	22	6,0	2160	1000	19000	0	12,0	20,0	0,00900
6000 **	10	26	8,0	4550	1950	28000	34000	12,0	24,0	0,02000
6000-ZZ **	10	26	8,0	4550	1950	28000	0	12,0	24,0	0,02000
6200 **	10	30	9,0	5100	2400	26000	32000	14,2	25,8	0,03200
6300 **	10	35	11,0	8100	3450	20000	26000	14,2	30,8	0,05700
SS-6000-2RS	10	26	8,0	4100	1700	17000	0	12,0	24,0	0,01900
SS-6800-2RS	10	19	5,0	1460	740	22000	0	12,0	17,0	0,00500
6900	10	22	6,0	2700	1270	30000	36000	12,0	20,0	0,00900
6800-2RS	10	19	5,0	1830	925	24000	0	12,0	17,0	0,00500
63000-2RS	10	26	12,0	4200	1900	17500	0	12,0	24,0	0,03000
6800	10	19	5,0	1830	925	32000	38000	12,0	17,0	0,00500
6800-ZZ	10	19	5,0	1830	925	32000	0	12,0	17,0	0,00500
6200-ZZ **	10	30	9,0	5100	2400	26000	0	14,2	25,8	0,03200
6200-2RS **	10	30	9,0	5100	2400	17000	0	14,2	25,8	0,03200
6901-2RS	12	24	6,0	2890	1460	19000	0	14,0	22,0	0,01100
SS-6201-2RS	12	32	10,0	5500	2500	13000	0	16,2	27,8	0,03700
6001-ZZ **	12	28	8,0	5100	2400	26000	0	14,0	26,0	0,02200
SS-6301-2RS	12	37	12,0	8700	3800	12000	0	17,6	31,4	0,06000
6201-2RS **	12	32	10,0	6800	3050	15000	0	16,2	27,8	0,03700
6801-2RS	12	21	5,0	1920	1040	20000	0	14,0	19,0	0,00600
6801	12	21	5,0	1920	1040	29000	35000	14,0	19,0	0,00600
6301-2RS **	12	37	12,0	9650	4150	12000	0	17,6	31,4	0,06500
SS-6001-2RS	12	28	8,0	4600	2100	15000	0	14,0	26,0	0,02200
6201 **	12	32	10,0	6800	3050	22000	28000	16,2	27,8	0,03700
SS-6901-2RS	12	24	6,0	2310	1160	17500	0	14,0	22,0	0,01100

Kugellager Bohrung 10-12 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6301-ZZ **	12	37	12,0	9650	4150	19000	0	17,6	31,4	0,06500
6201-ZZ **	12	32	10,0	6800	3050	22000	0	16,2	27,8	0,03700
6901	12	24	6,0	2890	1460	27000	32000	14,0	22,0	0,01100
6801-ZZ	12	21	5,0	1920	1040	29000	0	14,0	19,0	0,00600
6001 **	12	28	8,0	5100	2400	26000	32000	14,0	26,0	0,02200
63001-2RS	12	28	12,0	5000	2150	16000	0	14,1	25,9	0,03000
62201-2RS	12	32	14,0	6200	2900	13500	0	16,2	27,7	0,04500
62301-2RS	12	37	17,0	9200	3900	13000	0	17,7	31,3	0,07000
6001-2RS **	12	28	8,0	5100	2400	17000	0	14,0	26,0	0,02200
SS-6801-2RS	12	21	5,0	1530	830	18500	0	14,0	19,0	0,00600
6901-ZZ	12	24	6,0	2890	1460	27000	0	14,0	22,0	0,01100
6301 **	12	37	12,0	9650	4150	19000	24000	17,6	31,4	0,06500