


Kugellager Bohrung 100-105 mm

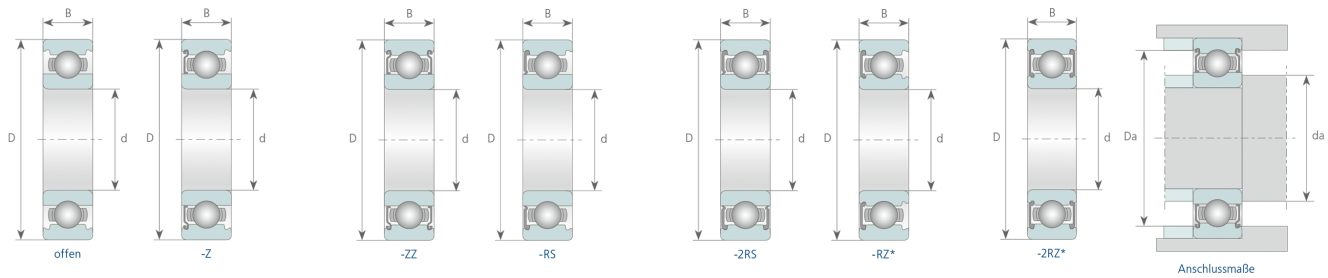

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6820-2RS	100	125	13,0	19600	21200	2700	0	99,9	99,9	0,31300
6320-ZZ	100	215	47,0	173000	140000	3000	0	99,9	99,9	7,00000
6920-ZZ	100	140	20,0	41000	39500	4500	0	99,9	99,9	0,78500
6020-ZZ	100	150	24,0	60500	54000	4300	0	99,9	99,9	1,25000
6820-ZZ	100	125	13,0	19600	21200	4800	0	99,9	99,9	0,31300
16020	100	150	16,0	45000	44000	4300	5000	99,9	99,9	0,91000
6320-2RS	100	215	47,0	173000	140000	2200	0	99,9	99,9	7,00000
6220-2RS	100	180	34,0	124000	93000	2300	0	99,9	99,9	3,50000
6320	100	215	47,0	173000	140000	3000	3600	99,9	99,9	7,00000
6920	100	140	20,0	41000	39500	4500	5300	99,9	99,9	0,78500
6020	100	150	24,0	60500	54000	4300	5000	99,9	99,9	1,25000
6820	100	125	13,0	19600	21200	4800	5600	99,9	99,9	0,31300
6220-ZZ	100	180	34,0	124000	93000	3400	0	99,9	99,9	3,50000
6220	100	180	34,0	124000	93000	3400	4000	99,9	99,9	3,50000
6920-2RS	100	140	20,0	41000	39500	0	0	99,9	99,9	0,78500
6020-2RS	100	150	24,0	60500	54000	2600	0	99,9	99,9	1,25000
6021-2RS	105	160	26,0	72800	65800	0	0	99,9	99,9	1,60000
6921-2RS	105	145	20,0	42500	42000	2500	0	99,9	99,9	0,81600
16021	105	160	18,0	53000	51000	4000	4800	99,9	99,9	1,20000
6921-ZZ	105	145	20,0	42500	42000	4300	0	99,9	99,9	0,81600
6221-ZZ	105	190	36,0	133000	104000	3200	0	99,9	99,9	3,70000
6921	105	145	20,0	42500	42000	4300	5100	99,9	99,9	0,81600
6321	105	225	49,0	184000	153000	2800	3400	99,9	99,9	8,00000
6221	105	190	36,0	133000	104000	3200	3800	99,9	99,9	3,70000
6021-ZZ	105	160	26,0	72800	65800	4000	0	99,9	99,9	1,60000
6221-2RS	105	190	36,0	133000	104000	0	0	99,9	99,9	3,70000
6821-ZZ	105	130	13,0	19800	22000	4600	0	99,9	99,9	0,33000
6321-ZZ	105	225	49,0	184000	153000	2800	0	99,9	99,9	8,00000
6021	105	160	26,0	72800	65800	4000	4800	99,9	99,9	1,60000
6821-2RS	105	130	13,0	19800	22000	0	0	99,9	99,9	0,33000
6821	105	130	13,0	19800	22000	4600	5400	99,9	99,9	0,33000