


Kugellager Bohrung 110-150 mm

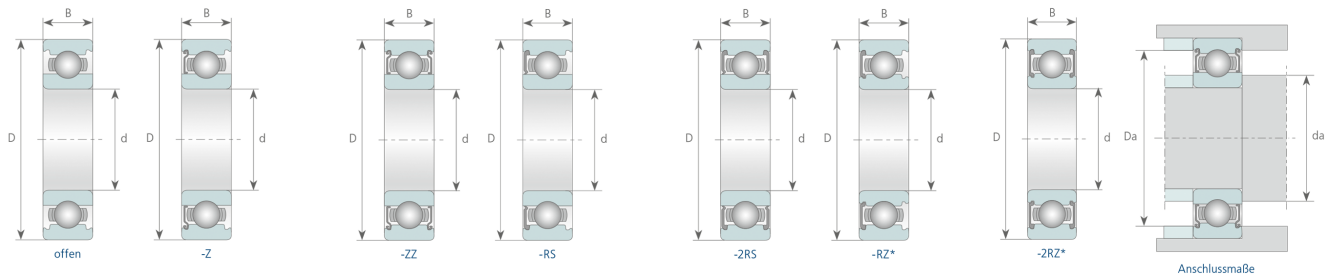

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6022	110	170	28,0	82000	73000	3800	4500	99,9	99,9	1,95000
6822-2RS	110	140	16,0	28100	29000	0	0	99,9	99,9	0,51500
6822	110	140	16,0	28100	29000	4300	5100	99,9	99,9	0,51500
16022	110	170	19,0	57200	56000	3800	4500	99,9	99,9	1,46000
6922	110	150	20,0	43500	44500	4100	4800	99,9	99,9	0,84900
6222-2RS	110	200	38,0	143000	118000	0	0	99,9	99,9	4,35000
6022-ZZ	110	170	28,0	82000	73000	3800	0	99,9	99,9	1,95000
6922-ZZ	110	150	20,0	43500	44500	4100	0	99,9	99,9	0,84900
6322	110	240	50,0	203000	178000	2600	3200	99,9	99,9	9,58000
6322-ZZ	110	240	50,0	203000	178000	2600	0	99,9	99,9	9,58000
6822-ZZ	110	140	16,0	28100	29000	4300	0	99,9	99,9	0,51500
6222-ZZ	110	200	38,0	143000	118000	3000	0	99,9	99,9	4,35000
6922-2RS	110	150	20,0	43500	44500	2400	0	99,9	99,9	0,84900
6222	110	200	38,0	143000	118000	3000	3600	99,9	99,9	4,35000
6322-2RS	110	240	50,0	203000	178000	0	0	99,9	99,9	9,58000
6022-2RS	110	170	28,0	82000	73000	0	0	99,9	99,9	1,95000
6924-2RS	120	165	22,0	53000	54000	0	0	99,9	99,9	1,15000
6824	120	150	16,0	28900	33000	4000	4700	99,9	99,9	0,55500
16024	120	180	19,0	63200	63300	3400	4000	99,9	99,9	1,70000
6824-2RS	120	150	16,0	28900	33000	0	0	99,9	99,9	0,55500
6824-ZZ	120	150	16,0	28900	33000	4000	0	99,9	99,9	0,55500
6024-ZZ	120	180	28,0	85000	79000	3400	0	99,9	99,9	2,09000
6024	120	180	28,0	85000	79000	3400	4000	99,9	99,9	2,09000
6224-ZZ	120	215	40,0	155000	131000	2800	0	99,9	99,9	5,15000
6024-2RS	120	180	28,0	85000	79000	0	0	99,9	99,9	2,09000
6324	120	260	55,0	212000	190000	2400	3000	99,9	99,9	13,60000
6924	120	165	22,0	53000	54000	3800	4400	99,9	99,9	1,15000
6224	120	215	40,0	155000	131000	2800	3400	99,9	99,9	5,15000
6224-2RS	120	215	40,0	155000	131000	0	0	99,9	99,9	5,15000
6924-ZZ	120	165	22,0	53000	54000	3800	0	99,9	99,9	1,15000
6826	130	165	18,0	37000	41000	3700	4300	99,9	99,9	0,80000
16026	130	200	22,0	79300	81000	3200	3800	99,9	99,9	2,50000
6226-2RS	130	230	40,0	167000	146000	0	0	99,9	99,9	6,00000
6826-ZZ	130	165	18,0	37000	41000	3700	0	99,9	99,9	0,80000

Kugellager Bohrung 110-150 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6226-ZZ	130	230	40,0	167000	146000	2600	0	99,9	99,9	6,00000
6026-2RS	130	200	33,0	106000	101000	0	0	99,9	99,9	3,25000
6026-ZZ	130	200	33,0	106000	101000	3200	0	99,9	99,9	3,25000
6926	130	180	24,0	65000	67500	3500	4100	99,9	99,9	1,52000
6926-ZZ	130	180	24,0	65000	67500	3500	0	99,9	99,9	1,52000
6226	130	230	40,0	167000	146000	2600	3100	99,9	99,9	6,00000
6026	130	200	33,0	106000	101000	3200	3800	99,9	99,9	3,25000
6326	130	280	58,0	229000	214000	2200	2800	99,9	99,9	17,00000
6826-2RS	130	165	18,0	37000	41000	0	0	99,9	99,9	0,80000
6926-2RS	130	180	24,0	65000	67500	0	0	99,9	99,9	1,52000
6828-2RS	140	175	18,0	38500	44500	0	0	99,9	99,9	0,85000
6928	140	190	24,0	66500	71500	3200	3800	99,9	99,9	1,62000
6028-2RS	140	210	33,0	111000	109000	0	0	99,9	99,9	3,35000
6328	140	300	62,0	255000	246000	2000	2600	99,9	99,9	21,00000
6228	140	250	42,0	176000	164000	2400	3000	99,9	99,9	7,50000
6028	140	210	33,0	111000	109000	2800	3400	99,9	99,9	3,35000
6828-ZZ	140	175	18,0	38500	44500	3400	0	99,9	99,9	0,85000
6928-2RS	140	190	24,0	66500	71500	0	0	99,9	99,9	1,62000
6928-ZZ	140	190	24,0	66500	71500	3200	0	99,9	99,9	1,62000
16028	140	210	22,0	80600	86000	2800	3400	99,9	99,9	2,70000
6028-ZZ	140	210	33,0	111000	109000	2800	0	99,9	99,9	3,35000
6828	140	175	18,0	38500	44500	3400	4000	99,9	99,9	0,85000
6830-2RS	150	190	20,0	47500	55000	0	0	99,9	99,9	1,16000
6930-2RS	150	210	28,0	85000	90500	0	0	99,9	99,9	2,47000
16030	150	225	24,0	92300	98000	2600	3200	99,9	99,9	3,40000
6030-ZZ	150	225	35,0	125000	126000	2600	0	99,9	99,9	4,75000
6930	150	210	28,0	85000	90500	3000	3500	99,9	99,9	2,47000
6930-ZZ	150	210	28,0	85000	90500	3000	0	99,9	99,9	2,47000
6830	150	190	20,0	47500	55000	3100	3700	99,9	99,9	1,16000
6030-2RS	150	225	35,0	125000	126000	0	0	99,9	99,9	4,75000
6330	150	320	65,0	276000	284000	1900	2400	99,9	99,9	25,00000
6230	150	270	45,0	176000	170000	2000	2600	99,9	99,9	9,60000
6830-ZZ	150	190	20,0	47500	55000	3100	0	99,9	99,9	1,16000
6030	150	225	35,0	125000	126000	2600	3200	99,9	99,9	4,75000