


Kugellager Bohrung 20-25 mm

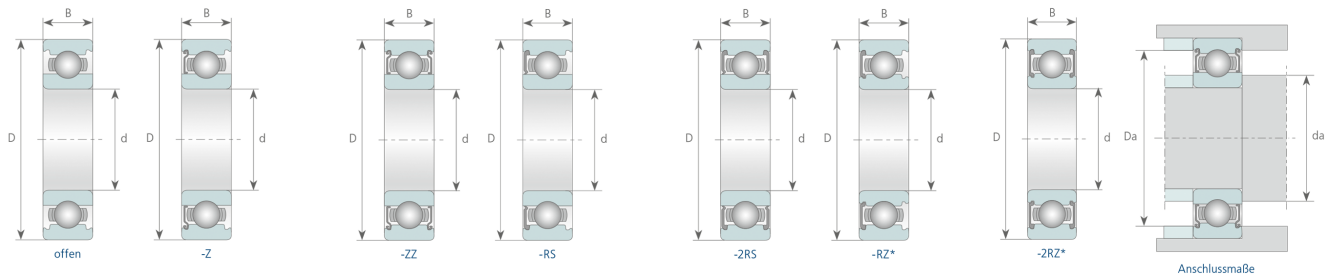

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6304-2RS **	20	52	15,0	15900	7900	8000	0	27,0	45,0	0,15800
SS-6304-2RS	20	52	15,0	14300	7100	8000	0	27,0	45,0	0,14400
16004-2RS	20	42	8,0	7950	4300	0	0	22,0	40,0	0,05000
6804	20	32	7,0	3450	2250	21000	25000	22,0	30,0	0,01900
SS-6804-2RS	20	32	7,0	2760	1800	11200	0	22,0	30,0	0,01900
SS-6004-2RS	20	42	12,0	8400	4500	9000	0	23,2	38,8	0,06900
6904	20	37	9,0	6400	3700	19000	23000	22,0	35,0	0,03600
6204-2RS **	20	47	14,0	12800	6650	10000	0	25,6	41,4	0,11800
16004-ZZ	20	42	8,0	7950	4300	17000	0	22,0	40,0	0,05000
6204 **	20	47	14,0	12800	6650	15000	18000	25,6	41,4	0,11800
6304-ZZ **	20	52	15,0	15900	7900	13000	0	27,0	45,0	0,15800
6204-ZZ **	20	47	14,0	12800	6650	15000	0	25,6	41,4	0,11800
6904-2RS	20	37	9,0	6400	3700	12000	0	22,0	35,0	0,03600
63004-2RS	20	42	16,0	8800	4600	10200	0	23,4	38,8	0,08800
62304-2RS	20	52	21,0	15500	7500	9000	0	27,1	45,0	0,20900
16004	20	42	8,0	7950	4300	17000	20000	22,0	40,0	0,05000
6004-2RS **	20	42	12,0	9500	5050	11000	0	23,2	38,8	0,07000
SS-6904-2RS	20	37	9,0	5120	2960	10500	0	22,0	35,0	0,03600
6304 **	20	52	15,0	15900	7900	13000	16000	27,0	45,0	0,15800
62204-2RS	20	47	18,0	12000	6500	9500	0	25,7	41,3	0,13900
6004 **	20	42	12,0	9500	5050	17000	20000	23,2	38,8	0,07000
SS-6204-2RS	20	47	14,0	11500	6000	8000	0	25,6	41,4	0,10600
6004-ZZ **	20	42	12,0	9500	5050	17000	0	23,2	38,8	0,07000
6804-2RS	20	32	7,0	3450	2250	13000	0	22,0	30,0	0,01900
6904-ZZ	20	37	9,0	6400	3700	19000	0	22,0	35,0	0,03600
6804-ZZ	20	32	7,0	3450	2250	21000	0	22,0	30,0	0,01900
6404	20	72	19,0	31000	15200	10000	13000	27,0	65,0	0,12000
16005-2RS	25	47	8,0	8400	5100	0	0	27,0	45,0	0,05800
SS-6805-2RS	25	37	7,0	3440	2080	8500	0	27,0	35,0	0,02200
6305 **	25	62	17,0	20600	11300	11000	14000	32,0	55,0	0,25000
SS-6305-2RS	25	62	17,0	19000	9800	6500	0	32,0	55,0	0,23200
6905-2RS	25	42	9,0	7050	4550	9800	0	27,0	40,0	0,04200
6905-ZZ	25	42	9,0	7050	4550	16000	0	27,0	40,0	0,04200
6005-2RS **	25	47	12,0	10100	5850	9500	0	28,2	43,8	0,08600

Kugellager Bohrung 20-25 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6305-ZZ **	25	62	17,0	20600	11300	11000	0	32,0	55,0	0,25000
62305-2RS	25	62	24,0	22000	11000	7300	0	32,0	55,0	0,27200
6205 **	25	52	15,0	14000	7850	12000	15000	30,6	46,4	0,14200
6805-ZZ	25	37	7,0	4300	2600	18000	0	27,0	35,0	0,02200
16005	25	47	8,0	8400	5100	15000	18000	27,0	45,0	0,05800
6805-2RS	25	37	7,0	4300	2600	10000	0	27,0	35,0	0,02200
16005-ZZ	25	47	8,0	8400	5100	15000	0	27,0	45,0	0,05800
63005-2RS	25	47	16,0	10500	6000	9100	0	29,3	43,7	0,10500
SS-6205-2RS	25	52	15,0	12600	7000	7000	0	30,6	46,4	0,12800
SS-6005-2RS	25	47	12,0	9000	5200	7500	0	28,2	43,8	0,08000
6405	25	80	21,0	37000	18800	9000	11000	36,0	71,0	0,57500
6005 **	25	47	12,0	10100	5850	15000	18000	28,2	43,8	0,08600
6805	25	37	7,0	4300	2600	18000	21000	27,0	35,0	0,02200
6905	25	42	9,0	7050	4550	16000	19000	27,0	40,0	0,04200
SS-6905-2RS	25	42	9,0	5640	3640	8400	0	27,0	40,0	0,04200
6205-ZZ **	25	52	15,0	14000	7850	12000	0	30,6	46,4	0,14200
6305-2RS **	25	62	17,0	20600	11300	7500	0	32,0	55,0	0,25000
6005-ZZ **	25	47	12,0	10100	5850	15000	0	28,2	43,8	0,08600
6205-2RS **	25	52	15,0	14000	7850	8000	0	30,6	46,4	0,14200
62205-2RS	25	52	18,0	13800	7700	9000	0	30,6	46,4	0,15600