


Kugellager Bohrung 30-35 mm

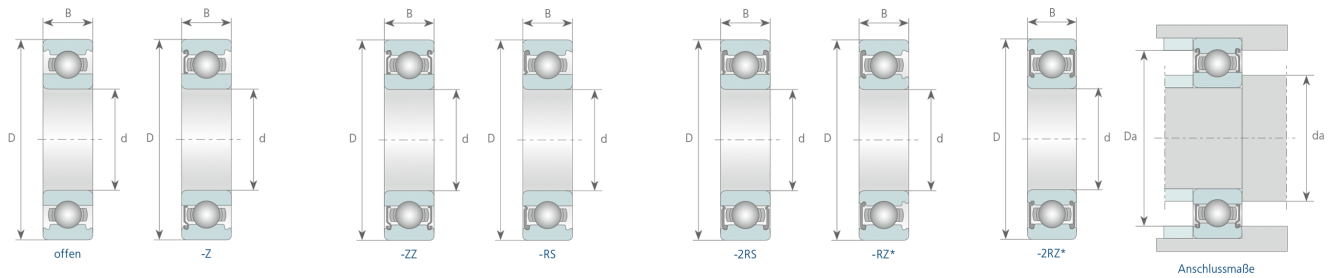

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6006-2RS **	30	55	13,0	13200	8250	7500	0	34,6	50,4	0,12900
6206-2RS **	30	62	16,0	19500	11300	7000	0	35,6	56,4	0,21000
SS-6306-2RS	30	72	19,0	24000	13500	5500	0	37,0	65,0	0,36000
16006-2RS	30	55	9,0	11200	7350	0	0	32,0	53,0	0,08700
6806	30	42	7,0	4400	2900	15000	18000	32,0	40,0	0,02600
6906	30	47	9,0	7250	5000	14000	17000	32,0	45,0	0,04800
6906-ZZ	30	47	9,0	7250	5000	14000	0	32,0	45,0	0,04800
SS-6806-2RS	30	42	7,0	3520	2320	7500	0	32,0	40,0	0,02600
6806-ZZ	30	42	7,0	4400	2900	15000	0	32,0	40,0	0,02600
SS-6006-2RS	30	55	13,0	11900	7500	6000	0	34,6	50,4	0,12000
62306-2RS	30	72	27,0	28500	16000	6100	0	37,0	65,0	0,50000
SS-6906-2RS	30	47	9,0	5800	4000	7200	0	32,0	45,0	0,04800
6306-ZZ **	30	72	19,0	29900	15800	9000	0	37,0	65,0	0,37100
6306-2RS **	30	72	19,0	29900	15800	6000	0	37,0	65,0	0,37100
SS-6206-2RS	30	62	16,0	17500	10100	5800	0	35,6	56,4	0,19900
63006-2RS	30	55	19,0	12500	7800	7600	0	34,6	50,3	0,16500
6306 **	30	72	19,0	29900	15800	9000	11000	37,0	65,0	0,37100
6906-2RS	30	47	9,0	7250	5000	8400	0	32,0	45,0	0,04800
6806-2RS	30	42	7,0	4400	2900	8800	0	32,0	40,0	0,02600
16006	30	55	9,0	11200	7350	12000	15000	32,0	53,0	0,08700
6206-ZZ **	30	62	16,0	19500	11300	10000	0	35,6	56,4	0,21000
6406	30	90	23,0	47300	24500	8500	10000	39,0	81,0	0,78500
62206-2RS	30	62	20,0	19000	11000	7300	0	35,7	56,2	0,24500
6006 **	30	55	13,0	13200	8250	12000	15000	34,6	50,4	0,12900
6206 **	30	62	16,0	19500	11300	10000	13000	35,6	56,4	0,21000
6006-ZZ **	30	55	13,0	13200	8250	12000	0	34,6	50,4	0,12900
16006-ZZ	30	55	9,0	11200	7350	12000	0	32,0	53,0	0,08700
6907-ZZ	35	55	10,0	11200	7450	12000	0	39,0	51,0	0,07400
SS-6007-2RS	35	62	14,0	14400	9300	5000	0	39,6	57,4	0,16000
6307-2RS **	35	80	21,0	33500	18300	5600	0	44,0	71,0	0,45000
6907-2RS	35	55	10,0	11200	7450	7100	0	39,0	51,0	0,07400
6007-ZZ **	35	62	14,0	15900	10300	10000	0	39,6	57,4	0,16400
62307-2RS	35	80	31,0	33000	18500	5500	0	44,1	70,8	0,68700
16007-2RS	35	62	9,0	12200	8850	0	0	37,0	60,0	0,11100

Kugellager Bohrung 30-35 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6807-2RS	35	47	7,0	4000	3250	7600	0	37,0	45,0	0,02900
16007	35	62	9,0	12200	8850	10000	13000	37,0	60,0	0,11100
6207 **	35	72	17,0	25700	15400	9000	11000	42,0	65,0	0,31500
6907	35	55	10,0	11200	7450	12000	15000	39,0	51,0	0,07400
SS-6907-2RS	35	55	10,0	8960	5960	6200	0	39,0	51,0	0,07400
6207-2RS **	35	72	17,0	25700	15400	6000	0	42,0	65,0	0,31500
6307-ZZ **	35	80	21,0	33500	18300	8500	0	44,0	71,0	0,45000
6807-ZZ	35	47	7,0	4000	3250	13000	0	37,0	45,0	0,02900
62207-2RS	35	72	23,0	25000	15000	6000	0	42,0	64,8	0,39300
SS-6307-2RS	35	80	21,0	30000	17100	4800	0	44,0	71,0	0,45700
SS-6807-2RS	35	47	7,0	3200	2600	6500	0	37,0	45,0	0,02900
6307 **	35	80	21,0	33500	18300	8500	10000	44,0	71,0	0,45000
6407	35	100	25,0	55500	29400	7000	8500	46,0	89,0	0,95100
SS-6207-2RS	35	72	17,0	23000	13800	5000	0	42,0	65,0	0,28800
63007-2RS	35	62	20,0	14800	9800	6700	0	39,7	57,4	0,21000
6007-2RS **	35	62	14,0	15900	10300	7000	0	39,6	57,4	0,16400
6007 **	35	62	14,0	15900	10300	10000	13000	39,6	57,4	0,16400
16007-ZZ	35	62	9,0	12200	8850	10000	0	37,0	60,0	0,11100
6207-ZZ **	35	72	17,0	25700	15400	9000	0	42,0	65,0	0,31500
6807	35	47	7,0	4000	3250	13000	16000	37,0	45,0	0,02900