


Kugellager Bohrung 40-45 mm

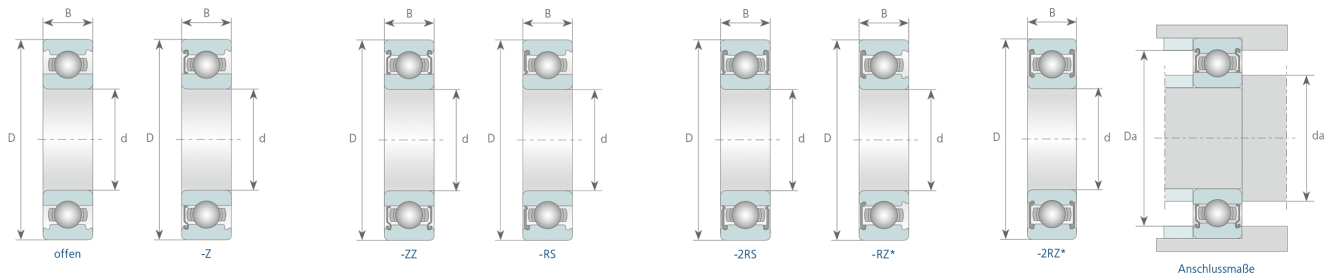

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-6908-2RS	40	62	12,0	11680	8160	5200	0	44,0	58,0	0,11000
62208-2RS	40	80	23,0	28500	17500	5500	0	47,0	73,0	0,48000
6208-ZZ **	40	80	18,0	32000	17800	8500	0	47,0	73,0	0,40200
6208 **	40	80	18,0	32000	17800	8500	10000	47,0	73,0	0,40200
6308-2RS **	40	90	23,0	40700	24000	5000	0	49,0	81,0	0,63500
SS-6008-2RS	40	68	15,0	15100	10300	4800	0	44,6	63,4	0,19000
6908-ZZ	40	62	12,0	14600	10200	11000	0	44,0	58,0	0,11000
6308-ZZ **	40	90	23,0	40700	24000	7500	0	49,0	81,0	0,63500
6208-2RS **	40	80	18,0	32000	17800	5600	0	47,0	73,0	0,40200
63008-2RS	40	68	21,0	15900	10900	5900	0	44,6	63,3	0,26000
6808	40	52	7,0	4500	4050	12000	14000	42,0	50,0	0,03300
6008-ZZ **	40	68	15,0	16800	11600	9500	0	44,6	63,4	0,21000
SS-6208-2RS	40	80	18,0	26200	16000	4500	0	47,0	73,0	0,36600
6408	40	110	27,0	64000	35000	6700	8000	53,0	97,0	1,22700
6908-2RS	40	62	12,0	14600	10200	6300	0	44,0	58,0	0,11000
16008-2RS	40	68	9,0	13300	9800	0	0	42,0	66,0	0,13000
6908	40	62	12,0	14600	10200	11000	13000	44,0	58,0	0,11000
6808-2RS	40	52	7,0	4500	4050	6700	0	42,0	50,0	0,03300
6308 **	40	90	23,0	40700	24000	7500	9000	49,0	81,0	0,63500
6008 **	40	68	15,0	16800	11600	9500	12000	44,6	63,4	0,21000
6008-2RS **	40	68	15,0	16800	11600	6000	0	44,6	63,4	0,21000
6808-ZZ	40	52	7,0	4500	4050	12000	0	42,0	50,0	0,03300
16008	40	68	9,0	13300	9800	9500	12000	42,0	66,0	0,13000
SS-6308-2RS	40	90	23,0	36400	21600	4200	0	49,0	81,0	0,63000
SS-6808-2RS	40	52	7,0	3600	3240	5500	0	42,0	50,0	0,03300
16008-ZZ	40	68	9,0	13300	9800	9500	0	42,0	66,0	0,13000
62308-2RS	40	90	33,0	42000	24500	4800	0	49,0	81,0	0,90800
SS-6309-2RS	45	85	23,0	47400	28500	4000	0	52,0	78,0	0,83800
6809-ZZ	45	58	7,0	6400	5650	9500	0	47,0	56,0	0,04000
62209-2RS	45	85	23,0	30000	20000	5100	0	52,1	77,8	0,52500
16009-2RS	45	75	10,0	15600	12300	0	0	48,2	71,8	0,17000
6809-2RS	45	58	7,0	6400	5650	5900	0	47,0	56,0	0,04000
6009-ZZ **	45	75	16,0	21000	15000	9000	0	49,6	70,4	0,26100
16009	45	75	10,0	15600	12300	9000	11000	48,2	71,8	0,17000

Kugellager Bohrung 40-45 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6909	45	68	12,0	15100	11200	9800	12000	49,0	64,0	0,12800
6909-ZZ	45	68	12,0	15100	11200	9800	0	49,0	64,0	0,12800
6009 **	45	75	16,0	21000	15000	9000	11000	49,6	70,4	0,26100
6209-ZZ **	45	85	19,0	32700	20200	8000	0	52,0	78,0	0,41400
16009-ZZ	45	75	10,0	15600	12300	9000	0	48,2	71,8	0,17000
6309 **	45	100	25,0	52700	31700	6700	8000	54,0	91,0	0,83800
6409	45	120	29,0	76100	44900	5600	6700	58,0	99,9	1,54000
6009-2RS **	45	75	16,0	21000	15000	5600	0	49,6	70,4	0,26100
62309-2RS	45	100	36,0	52500	31000	4200	0	54,2	90,8	0,88000
6209 **	45	85	19,0	32700	20200	8000	9500	52,0	78,0	0,41400
6809	45	58	7,0	6400	5650	9500	12000	47,0	56,0	0,04000
6309-2RS **	45	100	25,0	52700	31700	4300	0	54,0	91,0	0,83800
6209-2RS **	45	85	19,0	32700	20200	5300	0	52,0	78,0	0,41400
6309-ZZ **	45	100	25,0	52700	31700	6700	0	54,0	91,0	0,83800
6909-2RS	45	68	12,0	15100	11200	5600	0	49,0	64,0	0,12800
SS-6009-2RS	45	75	16,0	20800	14600	4480	0	49,6	70,4	0,26100
SS-6209-2RS	45	85	19,0	29430	18100	4240	0	52,0	78,0	0,41400
63009-2RS	45	75	23,0	19800	13900	5000	0	50,9	69,1	0,34000