


Kugellager Bohrung 50-55 mm

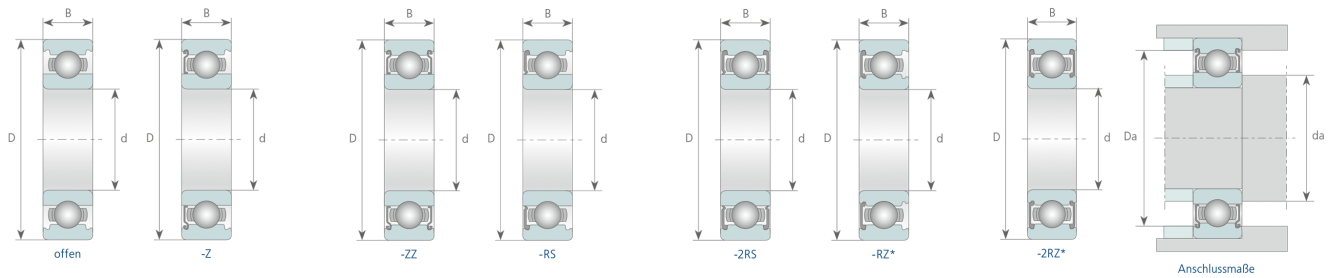

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6910-2RS	50	72	12,0	15600	12200	5100	0	54,0	68,0	0,13200
SS-6010-2RS	50	80	16,0	19600	14800	4240	0	54,6	75,4	0,26000
16010-2RS	50	80	10,0	16300	13100	0	0	53,2	76,8	0,18800
6810-ZZ	50	65	7,0	6600	6100	9600	0	52,0	63,0	0,05200
16010	50	80	10,0	16300	13100	8500	10000	53,2	76,8	0,18800
6210-ZZ **	50	90	20,0	35100	23100	7000	0	57,0	83,0	0,46000
6910-ZZ	50	72	12,0	15600	12200	8900	0	54,0	68,0	0,13200
6210-2RS **	50	90	20,0	35100	23100	4500	0	57,0	83,0	0,46000
6810-2RS	50	65	7,0	6600	6100	5300	0	52,0	63,0	0,05200
6210 **	50	90	20,0	35100	23100	7000	8500	57,0	83,0	0,46000
6310-2RS **	50	110	27,0	62000	37900	4000	0	61,0	99,0	1,06200
16010-ZZ	50	80	10,0	16300	13100	8500	0	53,2	76,8	0,18800
6810	50	65	7,0	6600	6100	9600	11000	52,0	63,0	0,05200
6910	50	72	12,0	15600	12200	8900	11000	54,0	68,0	0,13200
6010 **	50	80	16,0	21800	16500	8500	10000	54,6	75,4	0,26000
6010-2RS **	50	80	16,0	21800	16500	5300	0	54,6	75,4	0,26000
SS-6210-2RS	50	90	20,0	31600	23200	3600	0	57,0	83,0	0,46000
6310-ZZ **	50	110	27,0	62000	37900	6000	0	61,0	99,0	1,06200
SS-6310-2RS	50	110	27,0	55800	34100	3200	0	61,0	99,0	1,06200
6310 **	50	110	27,0	62000	37900	6000	7000	61,0	99,0	1,06200
62210-2RS	50	90	23,0	36000	23500	4600	0	57,1	82,9	0,54400
6010-ZZ **	50	80	16,0	21800	16500	8500	0	54,6	75,4	0,26000
62310-2RS	50	110	40,0	61500	37400	3800	0	61,2	98,9	1,60000
6410	50	130	31,0	87100	52000	5000	6000	64,0	99,9	1,89000
62311-2RS	55	120	43,0	71000	44000	3600	0	66,0	99,9	1,98000
SS-6011-2RS	55	90	18,0	25300	19100	3600	0	61,0	84,0	0,39000
SS-6211-2RS	55	100	21,0	39200	26400	3200	0	64,0	91,0	0,61100
6811-ZZ	55	72	9,0	8800	8100	8700	0	57,0	70,0	0,08300
6411	55	140	33,0	100000	62000	4800	5600	69,0	99,9	2,30000
6311-ZZ **	55	120	29,0	71500	44600	5300	0	66,0	99,9	1,38000
6911	55	80	13,0	16000	13300	8200	9600	60,0	75,0	0,18000
6811	55	72	9,0	8800	8100	8700	10000	57,0	70,0	0,08300
6811-2RS	55	72	9,0	8800	8100	4800	0	57,0	70,0	0,08300
6911-ZZ	55	80	13,0	16000	13300	8200	0	60,0	75,0	0,18000

Kugellager Bohrung 50-55 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6311-2RS **	55	120	29,0	71500	44600	3600	0	66,0	99,9	1,38000
6911-2RS	55	80	13,0	16000	13300	4600	0	60,0	75,0	0,18000
6311 **	55	120	29,0	71500	44600	5300	6300	66,0	99,9	1,38000
6011-2RS **	55	90	18,0	28100	21200	4500	0	61,0	84,0	0,39000
6011-ZZ **	55	90	18,0	28100	21200	7500	0	61,0	84,0	0,39000
6211-2RS **	55	100	21,0	43600	29300	4000	0	64,0	91,0	0,61100
6211 **	55	100	21,0	43600	29300	6300	7500	64,0	91,0	0,61100
6011 **	55	90	18,0	28100	21200	7500	9000	61,0	84,0	0,39000
16011	55	90	11,0	19300	16300	7500	9000	58,2	86,8	0,26000
62211-2RS	55	100	25,0	43000	28500	4100	0	63,9	91,0	0,71000
6211-ZZ **	55	100	21,0	43600	29300	6300	0	64,0	91,0	0,61100