


Kugellager Bohrung 6-9 mm

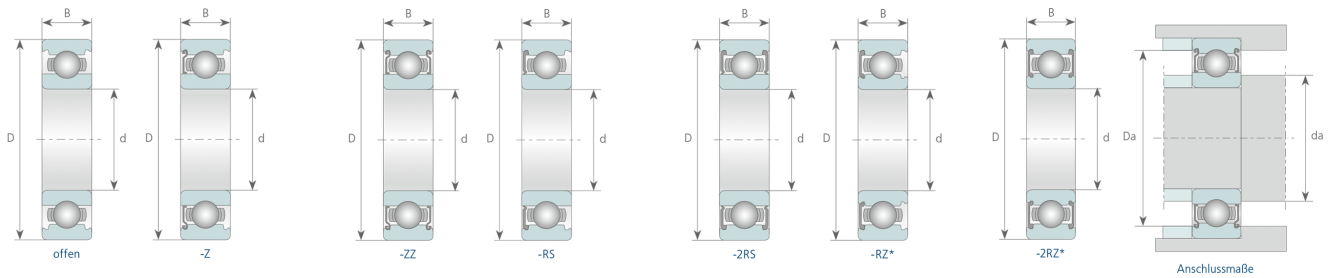

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
696	6	15	5,0	1365	500	39000	46000	7,6	13,4	0,00390
MR126-ZZ	6	12	4,0	481	160	42000	0	0,0	0,0	0,00125
626-2RS **	6	19	6,0	2288	860	21000	0	8,4	16,6	0,00840
MR106-ZZ	6	10	3,0	338	120	45000	0	0,0	0,0	0,00055
MR106-2RS	6	10	3,0	338	120	0	0	0,0	0,0	0,00055
686	6	13	3,5	1105	410	41000	48000	7,2	11,8	0,00187
626-ZZ **	6	19	6,0	2288	860	36000	0	8,4	16,6	0,00840
686-ZZ	6	13	5,0	1105	410	41000	0	7,2	11,8	0,00187
626 **	6	19	6,0	2288	860	36000	42000	8,4	16,6	0,00840
696-ZZ	6	15	5,0	1365	500	39000	0	7,6	13,4	0,00390
686-2RS	6	13	5,0	1105	410	0	0	7,2	11,8	0,00187
696-2RS	6	15	5,0	1365	500	0	0	7,6	13,4	0,00390
MR126-2RS	6	12	4,0	481	160	0	0	0,0	0,0	0,00125
MR126	6	12	3,0	481	160	42000	49000	0,0	0,0	0,00125
MR106	6	10	2,5	338	120	45000	54000	0,0	0,0	0,00055
607-ZZ **	7	19	6,0	2288	860	36000	0	9,0	17,0	0,00750
687-ZZ	7	14	5,0	1196	470	39000	0	8,2	12,8	0,00200
607-2RS **	7	19	6,0	2288	860	30000	0	9,0	17,0	0,00750
687-2RS	7	14	5,0	1196	470	0	0	8,2	12,8	0,00200
SS-607-2RS	7	19	6,0	2000	770	28000	0	9,0	17,0	0,00700
627-2RS **	7	22	7,0	3380	1320	29000	0	9,4	19,6	0,01300
MR117	7	11	2,5	312	100	42000	49000	0,0	0,0	0,00070
MR137-ZZ	7	13	4,0	364	140	40000	0	0,0	0,0	0,00150
687	7	14	3,5	1196	470	39000	46000	8,2	12,8	0,00200
627-ZZ **	7	22	7,0	3380	1320	34000	0	9,4	19,6	0,01300
MR117-2RS	7	11	3,0	312	100	0	0	0,0	0,0	0,00070
607 **	7	19	6,0	2288	860	36000	42000	9,0	17,0	0,00750
MR137	7	13	3,0	364	140	40000	47000	0,0	0,0	0,00150
MR137-2RS	7	13	4,0	364	140	0	0	0,0	0,0	0,00150
627 **	7	22	7,0	3380	1320	34000	39000	9,4	19,6	0,01300
MR117-ZZ	7	11	3,0	312	100	42000	0	0,0	0,0	0,00070
MR128-2RS	8	12	3,5	364	140	0	0	0,0	0,0	0,00070
608 **	8	22	7,0	3380	1320	34000	39000	10,0	20,0	0,01200
628-2RS **	8	24	8,0	3350	1410	20000	0	10,4	21,6	0,01700

Kugellager Bohrung 6-9 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
698-2RS	8	19	6,0	2240	870	0	0	10,0	17,0	0,00705
MR148-2RS	8	14	4,0	585	220	0	0	0,0	0,0	0,00190
688-2RS	8	16	5,0	1274	530	0	0	9,6	14,4	0,00300
SS-608-2RS	8	22	7,0	3000	1200	26000	0	10,0	20,0	0,01200
MR128	8	12	2,5	364	140	40000	47000	0,0	0,0	0,00070
698	8	19	6,0	2240	870	36000	43000	10,0	17,0	0,00705
628 **	8	24	8,0	3350	1410	33000	38000	10,4	21,6	0,01700
MR128-ZZ	8	12	3,5	364	140	40000	0	0,0	0,0	0,00070
628-ZZ **	8	24	8,0	3350	1410	33000	0	10,4	21,6	0,01700
608-2RS **	8	22	7,0	3380	1320	28000	0	10,0	20,0	0,01200
608-ZZ **	8	22	7,0	3380	1320	34000	0	10,0	20,0	0,01200
MR148	8	14	3,5	585	220	38000	45000	0,0	0,0	0,00190
698-ZZ	8	19	6,0	2240	870	36000	0	10,0	17,0	0,00705
688	8	16	4,0	1274	530	37000	43000	9,6	14,4	0,00300
688-ZZ	8	16	5,0	1274	530	37000	0	9,6	14,4	0,00300
MR148-ZZ	8	14	4,0	585	220	38000	0	0,0	0,0	0,00190
689-2RS	9	17	5,0	1350	580	0	0	10,6	15,4	0,00340
629-2RS **	9	26	8,0	4615	1816	27000	0	11,4	23,6	0,02000
609 **	9	24	7,0	3770	1560	33000	38000	11,0	22,0	0,01400
609-2RS **	9	24	7,0	3770	1560	27500	0	11,0	22,0	0,01400
689	9	17	4,0	1350	580	36000	43000	10,6	15,4	0,00340
689-ZZ	9	17	5,0	1350	580	36000	0	10,6	15,4	0,00340
SS-609-2RS	9	24	7,0	3300	1400	25000	0	11,0	22,0	0,01400
629 **	9	26	8,0	4615	1816	32000	37000	11,4	23,6	0,02000
609-ZZ **	9	24	7,0	3770	1560	33000	0	11,0	22,0	0,01400
629-ZZ **	9	26	8,0	4615	1816	32000	0	11,4	23,6	0,02000