


Kugellager Bohrung 60-65 mm

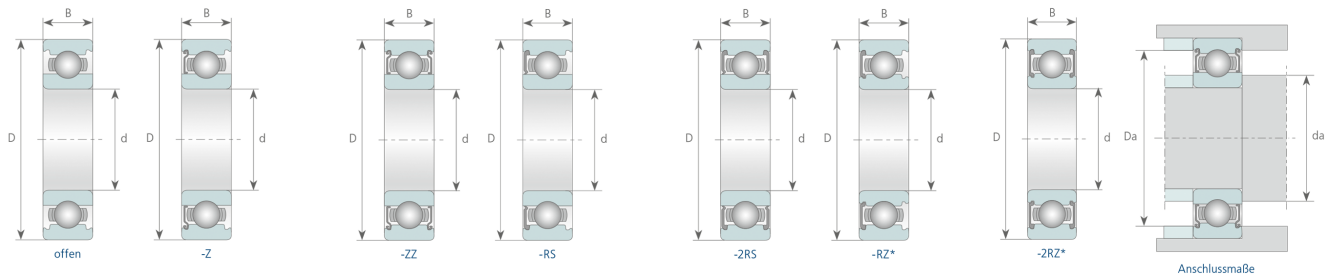

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-6212-2RS	60	110	22,0	47500	32500	3000	0	69,0	99,9	0,78000
6012 **	60	95	18,0	29400	23200	7800	8500	66,0	89,0	0,42000
6012-2RS **	60	95	18,0	29400	23200	4300	0	66,0	89,0	0,42000
6012-ZZ **	60	95	18,0	29400	23200	7800	0	66,0	89,0	0,42000
16012	60	95	11,0	19900	17600	7000	8500	63,2	91,8	0,28000
6212-2RS **	60	110	22,0	52400	36000	4000	0	69,0	99,9	0,78000
6812	60	78	10,0	11500	10600	8000	9400	62,0	76,0	0,10600
SS-6312-2RS	60	130	31,0	73400	46700	2900	0	72,0	99,9	1,72000
6312-2RS **	60	130	31,0	81500	51900	3400	0	72,0	99,9	1,72000
6812-ZZ	60	78	10,0	11500	10600	8000	0	62,0	76,0	0,10600
6212 **	60	110	22,0	52400	36000	6000	7000	69,0	99,9	0,78000
6412	60	150	35,0	110000	70800	1800	5600	74,0	99,9	2,76000
6912	60	85	13,0	16400	14300	7600	8900	65,0	80,0	0,19300
6912-2RS	60	85	13,0	16400	14300	4300	0	65,0	80,0	0,19300
SS-6012-2RS	60	95	18,0	26600	20900	3440	0	66,0	89,0	0,42000
6812-2RS	60	78	10,0	11500	10600	4400	0	62,0	76,0	0,10600
6912-ZZ	60	85	13,0	16400	14300	7600	0	65,0	80,0	0,19300
6312 **	60	130	31,0	81500	51900	5000	6000	72,0	99,9	1,72000
62312-2RS	60	130	46,0	81000	51500	3100	0	72,0	99,9	2,52000
6312-ZZ **	60	130	31,0	81500	51900	5000	0	72,0	99,9	1,72000
6212-ZZ **	60	110	22,0	52400	36000	6000	0	69,0	99,9	0,78000
62212-2RS	60	110	28,0	52000	35500	3800	0	69,1	99,9	0,98000
6813-ZZ	65	85	10,0	11600	11000	7400	0	69,0	81,0	0,12800
6213 **	65	120	23,0	57200	40000	5300	6300	74,0	99,9	0,99500
6913-2RS	65	90	13,0	17400	16100	4000	0	70,0	85,0	0,20600
16013	65	100	11,0	22900	19600	6300	7500	68,2	96,8	0,30000
62313-2RS	65	140	48,0	91700	59000	2800	0	77,0	99,9	3,00000
6313-ZZ **	65	140	33,0	93000	59700	4800	0	77,0	99,9	2,10000
6213-2RS **	65	120	23,0	57200	40000	3600	0	74,0	99,9	0,99500
6313 **	65	140	33,0	93000	59700	4800	5600	77,0	99,9	2,10000
6213-ZZ **	65	120	23,0	57200	40000	5300	0	74,0	99,9	0,99500
6013 **	65	100	18,0	30500	25200	6300	7500	71,0	94,0	0,44000
6313-2RS **	65	140	33,0	93000	59700	3000	0	77,0	99,9	2,10000
6913-ZZ	65	90	13,0	17400	16100	7000	0	70,0	85,0	0,20600

Kugellager Bohrung 60-65 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6413	65	160	37,0	118000	79000	4000	4800	79,0	99,9	3,30000
6813	65	85	10,0	11600	11000	7400	8700	69,0	81,0	0,12800
6913	65	90	13,0	17400	16100	7000	8200	70,0	85,0	0,20600
62213-2RS	65	120	31,0	55000	40000	3000	0	74,0	99,9	1,26000
6813-2RS	65	85	10,0	11600	11000	4100	0	69,0	81,0	0,12800
6013-ZZ **	65	100	18,0	30500	25200	6300	0	71,0	94,0	0,44000
6013-2RS **	65	100	18,0	30500	25200	4000	0	71,0	94,0	0,44000