


Kugellager Bohrung 7-25 mm

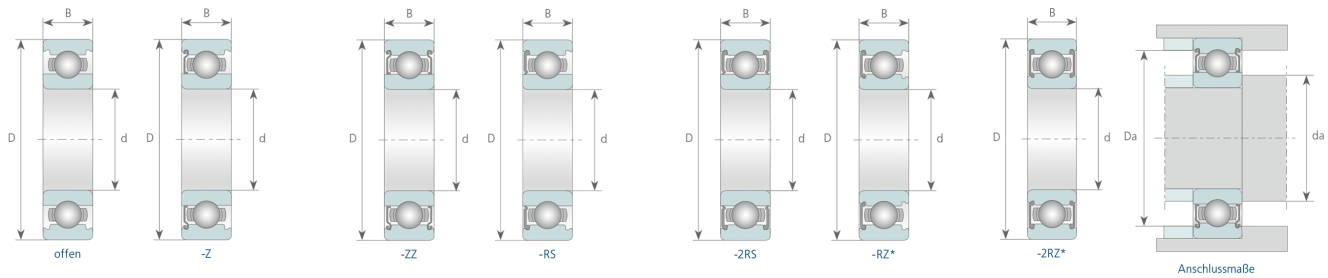

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-607-2RS	7	19	6,0	2000	770	28000	0	9,0	17,0	0,00700
SS-608-2RS	8	22	7,0	3000	1200	26000	0	10,0	20,0	0,01200
SS-609-2RS	9	24	7,0	3300	1400	25000	0	11,0	22,0	0,01400
SS-6200-2RS	10	30	9,0	4600	2100	15000	0	14,2	25,8	0,03200
SS-6000-2RS	10	26	8,0	4100	1700	17000	0	12,0	24,0	0,01900
SS-6300-2RS	10	35	11,0	7400	3100	13000	0	14,2	30,8	0,05300
SS-6800-2RS	10	19	5,0	1460	740	22000	0	12,0	17,0	0,00500
SS-6900-2RS	10	22	6,0	2160	1000	19000	0	12,0	20,0	0,00900
SS-6301-2RS	12	37	12,0	8700	3800	12000	0	17,6	31,4	0,06000
SS-6001-2RS	12	28	8,0	4600	2100	15000	0	14,0	26,0	0,02200
SS-6901-2RS	12	24	6,0	2310	1160	17500	0	14,0	22,0	0,01100
SS-6201-2RS	12	32	10,0	5500	2500	13000	0	16,2	27,8	0,03700
SS-6801-2RS	12	21	5,0	1530	830	18500	0	14,0	19,0	0,00600
SS-6002-2RS	15	32	9,0	5000	2500	12000	0	17,0	30,0	0,03000
SS-6802-2RS	15	24	5,0	1660	1000	15000	0	17,0	22,0	0,00700
SS-6302-2RS	15	42	13,0	10200	4900	10000	0	20,6	36,4	0,08200
SS-6902-2RS	15	28	7,0	3280	1640	14500	0	17,0	26,0	0,01600
SS-6202-2RS	15	35	11,0	6900	3200	12000	0	19,2	30,8	0,04500
SS-6203-2RS	17	40	12,0	8600	4100	10000	0	21,2	35,8	0,06600
SS-6803-2RS	17	26	5,0	1760	1120	13000	0	19,0	24,0	0,00800
SS-6903-2RS	17	30	7,0	3720	2060	12000	0	19,0	28,0	0,01800
SS-6003-2RS	17	35	10,0	6100	3000	11000	0	19,0	33,0	0,03900
SS-6303-2RS	17	47	14,0	12100	5900	9000	0	22,6	41,4	0,11500
SS-6004-2RS	20	42	12,0	8400	4500	9000	0	23,2	38,8	0,06900
SS-6804-2RS	20	32	7,0	2760	1800	11200	0	22,0	30,0	0,01900
SS-6304-2RS	20	52	15,0	14300	7100	8000	0	27,0	45,0	0,14400
SS-6904-2RS	20	37	9,0	5120	2960	10500	0	22,0	35,0	0,03600
SS-6204-2RS	20	47	14,0	11500	6000	8000	0	25,6	41,4	0,10600
SS-6205-2RS	25	52	15,0	12600	7000	7000	0	30,6	46,4	0,12800
SS-6805-2RS	25	37	7,0	3440	2080	8500	0	27,0	35,0	0,02200
SS-6305-2RS	25	62	17,0	19000	9800	6500	0	32,0	55,0	0,23200
SS-6005-2RS	25	47	12,0	9000	5200	7500	0	28,2	43,8	0,08000
SS-6905-2RS	25	42	9,0	5640	3640	8400	0	27,0	40,0	0,04200