


Kugellager Bohrung 70-75 mm

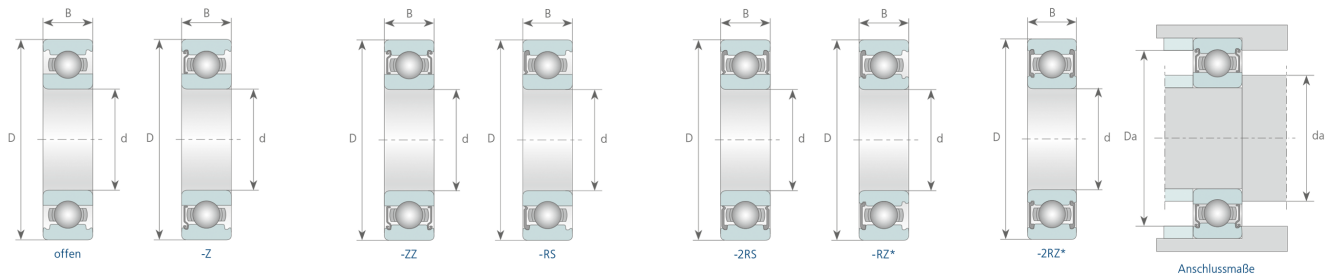

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6314-ZZ **	70	150	35,0	104000	68100	4500	0	82,0	99,9	2,50000
16014	70	110	13,0	28100	25000	6000	7000	73,2	99,9	0,43300
6214 **	70	125	24,0	62200	44100	5000	6000	79,0	99,9	1,07000
6814	70	90	10,0	12100	11900	6900	8100	74,0	86,0	0,13700
6314-2RS **	70	150	35,0	104000	68100	2800	0	82,0	99,9	2,50000
6814-2RS	70	90	10,0	12100	11900	3800	0	74,0	86,0	0,13700
SS-6214-2RS	70	125	24,0	56000	39700	2850	0	79,0	99,9	1,07000
SS-6314-2RS	70	150	35,0	94000	61300	2400	0	82,0	99,9	2,50000
62314-2RS	70	150	51,0	102000	66500	2600	0	82,0	99,9	3,56000
6214-2RS **	70	125	24,0	62200	44100	3400	0	79,0	99,9	1,07000
6314 **	70	150	35,0	104000	68100	4500	5300	82,0	99,9	2,50000
6014 **	70	110	20,0	38100	30900	6000	7000	76,0	99,9	0,60000
62214-2RS	70	125	31,0	59000	44000	3000	0	79,0	99,9	1,35000
6814-ZZ	70	90	10,0	12100	11900	6900	0	74,0	86,0	0,13700
6914-ZZ	70	100	16,0	23700	21200	6500	0	75,0	95,0	0,33400
6214-ZZ **	70	125	24,0	62200	44100	5000	0	79,0	99,9	1,07000
6914-2RS	70	100	16,0	23700	21200	3700	0	75,0	95,0	0,33400
6014-2RS **	70	110	20,0	38100	30900	3600	0	76,0	99,9	0,60000
6414	70	180	42,0	143000	104000	3800	4500	86,0	99,9	4,85000
6014-ZZ **	70	110	20,0	38100	30900	6000	0	76,0	99,9	0,60000
SS-6014-2RS	70	110	20,0	34300	28000	3050	0	76,0	99,9	0,60000
6914	70	100	16,0	23700	21200	6500	7700	75,0	95,0	0,33400
6815-ZZ	75	95	10,0	12500	12900	6400	0	79,0	91,0	0,14500
6015 **	75	115	20,0	39700	33500	5600	6700	81,0	99,9	0,64000
6815	75	95	10,0	12500	12900	6400	7600	79,0	91,0	0,14500
6815-2RS	75	95	10,0	12500	12900	3600	0	79,0	91,0	0,14500
6315 **	75	160	37,0	114000	77000	4300	5000	87,0	99,9	3,03000
6315-ZZ **	75	160	37,0	114000	77000	4300	0	87,0	99,9	3,03000
6015-2RS **	75	115	20,0	39700	33500	3400	0	81,0	99,9	0,64000
6915	75	105	16,0	24400	22600	6100	7200	80,0	99,9	0,35300
6215-2RS **	75	130	25,0	67400	49300	3200	0	84,0	99,9	1,18000
16015	75	115	13,0	28600	26800	5600	6700	78,2	99,9	0,46000
6215 **	75	130	25,0	67400	49300	4800	5600	84,0	99,9	1,18000
6015-ZZ **	75	115	20,0	39700	33500	5600	0	81,0	99,9	0,64000

Kugellager Bohrung 70-75 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
SS-6015-2RS	75	115	20,0	36000	30200	2750	0	81,0	99,9	0,64000
6215-ZZ **	75	130	25,0	67400	49300	4800	0	84,0	99,9	1,18000
6915-ZZ	75	105	16,0	24400	22600	6100	0	80,0	99,9	0,35300
6315-2RS **	75	160	37,0	114000	77000	2800	0	87,0	99,9	3,03000
6915-2RS	75	105	16,0	24400	22600	3500	0	80,0	99,9	0,35300
6415	75	190	45,0	153000	115000	3600	4300	91,0	99,9	6,50000