


ASFW 201 ... ASFW 208 FLANSCHLAGER, GUSSGEHÄUSE

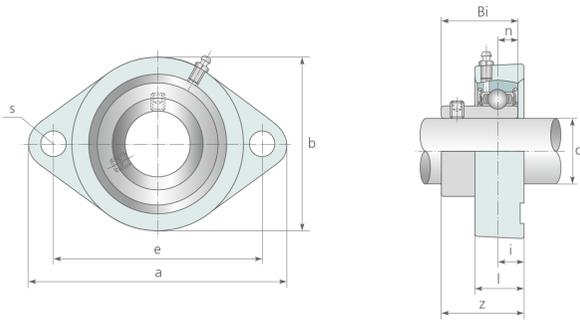

	Abmessungen [mm]											Tragzahl [kN]		Gewicht [kg]		
	d[mm]	a	e	i	l	s	b	z	Bi	n	S Schraube	Lager	Gehäuse		dyn.C	stat.C0
ASFW 201	12	81,0	63,5	7,5	15,0	7	59,0	23,5	22	6,0	M6	AS 201	FW 201	9,6	4,8	0,30
ASFW 202	15	81,0	63,5	7,5	15,0	7	59,0	23,5	22	6,0	M6	AS 202	FW 202	9,6	4,8	0,29
ASFW 203	17	81,0	63,5	7,5	15,0	7	59,0	23,5	22	6,0	M6	AS 203	FW 203	9,6	4,8	0,28
ASFW 204	20	90,5	71,4	9,5	17,0	10	66,5	27,5	25	7,0	M8	AS 204	FW 204	12,8	6,7	0,38
ASFW 205	25	97,0	76,2	9,5	17,5	10	71,0	29,0	27	7,5	M8	AS 205	FW 205	14,0	7,9	0,46
ASFW 206	30	112,5	90,5	10,0	21,0	12	84,0	32,0	30	8,0	M10	AS 206	FW 206	19,5	11,3	0,71
ASFW 207	35	126,0	100,0	10,0	22,0	12	94,0	33,5	32	8,5	M10	AS 207	FW 207	25,7	15,4	0,95
ASFW 208	40	148,0	119,0	14,5	25,0	14	104,0	43,5	34	9,0	M12	AS 208	FW 208	32,0	17,8	1,20