


Kugellager

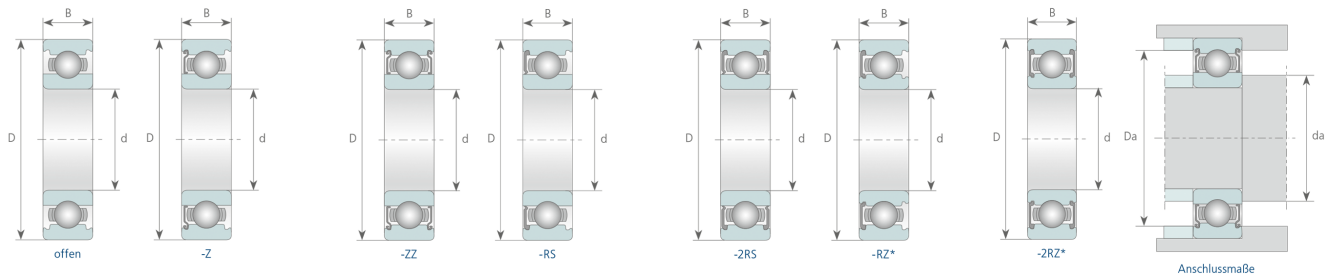

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
605-2RS	5	14	5,0	1352	500	0	0	6,6	12,4	0,00300
605-ZZ	5	14	5,0	1352	500	41000	0	6,6	12,4	0,00300
605	5	14	5,0	1352	500	41000	48000	6,6	12,4	0,00300
607 **	7	19	6,0	2288	860	36000	42000	9,0	17,0	0,00750
SS-607-2RS	7	19	6,0	2000	770	28000	0	9,0	17,0	0,00700
607-2RS **	7	19	6,0	2288	860	30000	0	9,0	17,0	0,00750
607-ZZ **	7	19	6,0	2288	860	36000	0	9,0	17,0	0,00750
608-2RS **	8	22	7,0	3380	1320	28000	0	10,0	20,0	0,01200
SS-608-2RS	8	22	7,0	3000	1200	26000	0	10,0	20,0	0,01200
608-ZZ **	8	22	7,0	3380	1320	34000	0	10,0	20,0	0,01200
608 **	8	22	7,0	3380	1320	34000	39000	10,0	20,0	0,01200
SS-609-2RS	9	24	7,0	3300	1400	25000	0	11,0	22,0	0,01400
609 **	9	24	7,0	3770	1560	33000	38000	11,0	22,0	0,01400
609-2RS **	9	24	7,0	3770	1560	27500	0	11,0	22,0	0,01400
609-ZZ **	9	24	7,0	3770	1560	33000	0	11,0	22,0	0,01400