


Kugellager Bohrung 160-240 mm

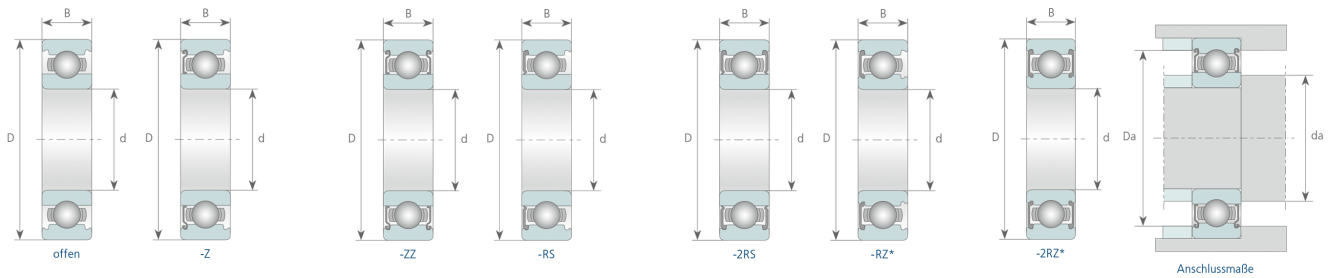

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min ⁻¹]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6232	160	290	48,0	185000	186000	1900	2400	99,9	99,9	15,00000
6032	160	240	38,0	140000	143000	2400	3000	99,9	99,9	5,85000
16032	160	240	25,0	99500	107000	2400	3000	99,9	99,9	3,60000
6832	160	200	20,0	48500	57000	2900	8400	99,9	99,9	1,32000
6932	160	220	28,0	87000	96000	2800	3300	99,9	99,9	2,61000
6034	170	260	42,0	168000	172000	2200	2800	99,9	99,9	7,80000
16034	170	260	28,0	119000	127000	2200	2800	99,9	99,9	5,70000
6934	170	230	28,0	86000	95500	2600	3100	99,9	99,9	2,74000
6834	170	215	22,0	60000	70500	2700	3200	99,9	99,9	1,63000
6234	170	310	52,0	212000	224000	1900	2400	99,9	99,9	17,50000
6236	180	320	52,0	227000	242000	1800	2200	99,9	99,9	18,50000
16036	180	280	31,0	140000	146000	2000	2600	99,9	99,9	7,00000
6036	180	280	46,0	186000	194000	2000	2600	99,9	99,9	10,50000
6836	180	225	22,0	60500	73000	2600	3000	99,9	99,9	2,03000
6936	180	250	33,0	110000	119000	2400	2900	99,9	99,9	4,76000
6038	190	290	46,0	195000	210000	2000	2600	99,9	99,9	11,00000
16038	190	290	31,0	148000	162000	2000	2600	99,9	99,9	7,90000
6838	190	240	24,0	73000	88000	2400	2900	99,9	99,9	2,62000
6238	190	340	55,0	255000	278000	1700	2000	99,9	99,9	23,00000
6938	190	260	33,0	113000	127000	2300	2700	99,9	99,9	4,98000
6840	200	250	24,0	74000	91500	2300	2700	99,9	99,9	2,73000
16040	200	310	34,0	168000	178000	1900	2400	99,9	99,9	9,00000
6240	200	360	58,0	280000	314000	1700	2000	99,9	99,9	28,00000
6040	200	310	51,0	208000	226000	1900	2400	99,9	99,9	13,09000
6940	200	280	38,0	157000	168000	2200	2600	99,9	99,9	7,10000
16044	220	340	37,0	191000	266000	1800	2200	99,9	99,9	12,00000
6844	220	270	24,0	76500	98000	2100	2400	99,9	99,9	3,00000
6044	220	340	56,0	277000	291000	1800	2200	99,9	99,9	19,00000
6244	220	400	65,0	311000	376000	1500	1800	99,9	99,9	37,00000
6944	220	300	38,0	160000	180000	2000	2300	99,9	99,9	7,69000
16048	240	360	37,0	181000	215000	1700	2000	99,9	99,9	14,00000
6248	240	440	72,0	360000	470000	1300	1600	99,9	99,9	51,00000
6948	240	320	38,0	170000	203000	1800	2100	99,9	99,9	8,26000
6848	240	300	28,0	98500	127000	1900	2200	99,9	99,9	4,60000

Kugellager Bohrung 160-240 mm

Kurz-Zeichen	Haupt-Abmessungen [mm]			Trag-Zahlen [N]		Grenz-Drehzahlen [min-1]		Anschluss-Maße [mm]		Gewicht [kg]
	d	D	B	dyn. Cr	stat. Cor	Fett	Öl	da min	Da max	
6048	240	360	56,0	247000	295000	1700	2000	99,9	99,9	19,50000